




Elitechnic

PANEL LIGHT CATALOGUE



Elitechnic Construction Co, Ltd.
"Building a superior future"

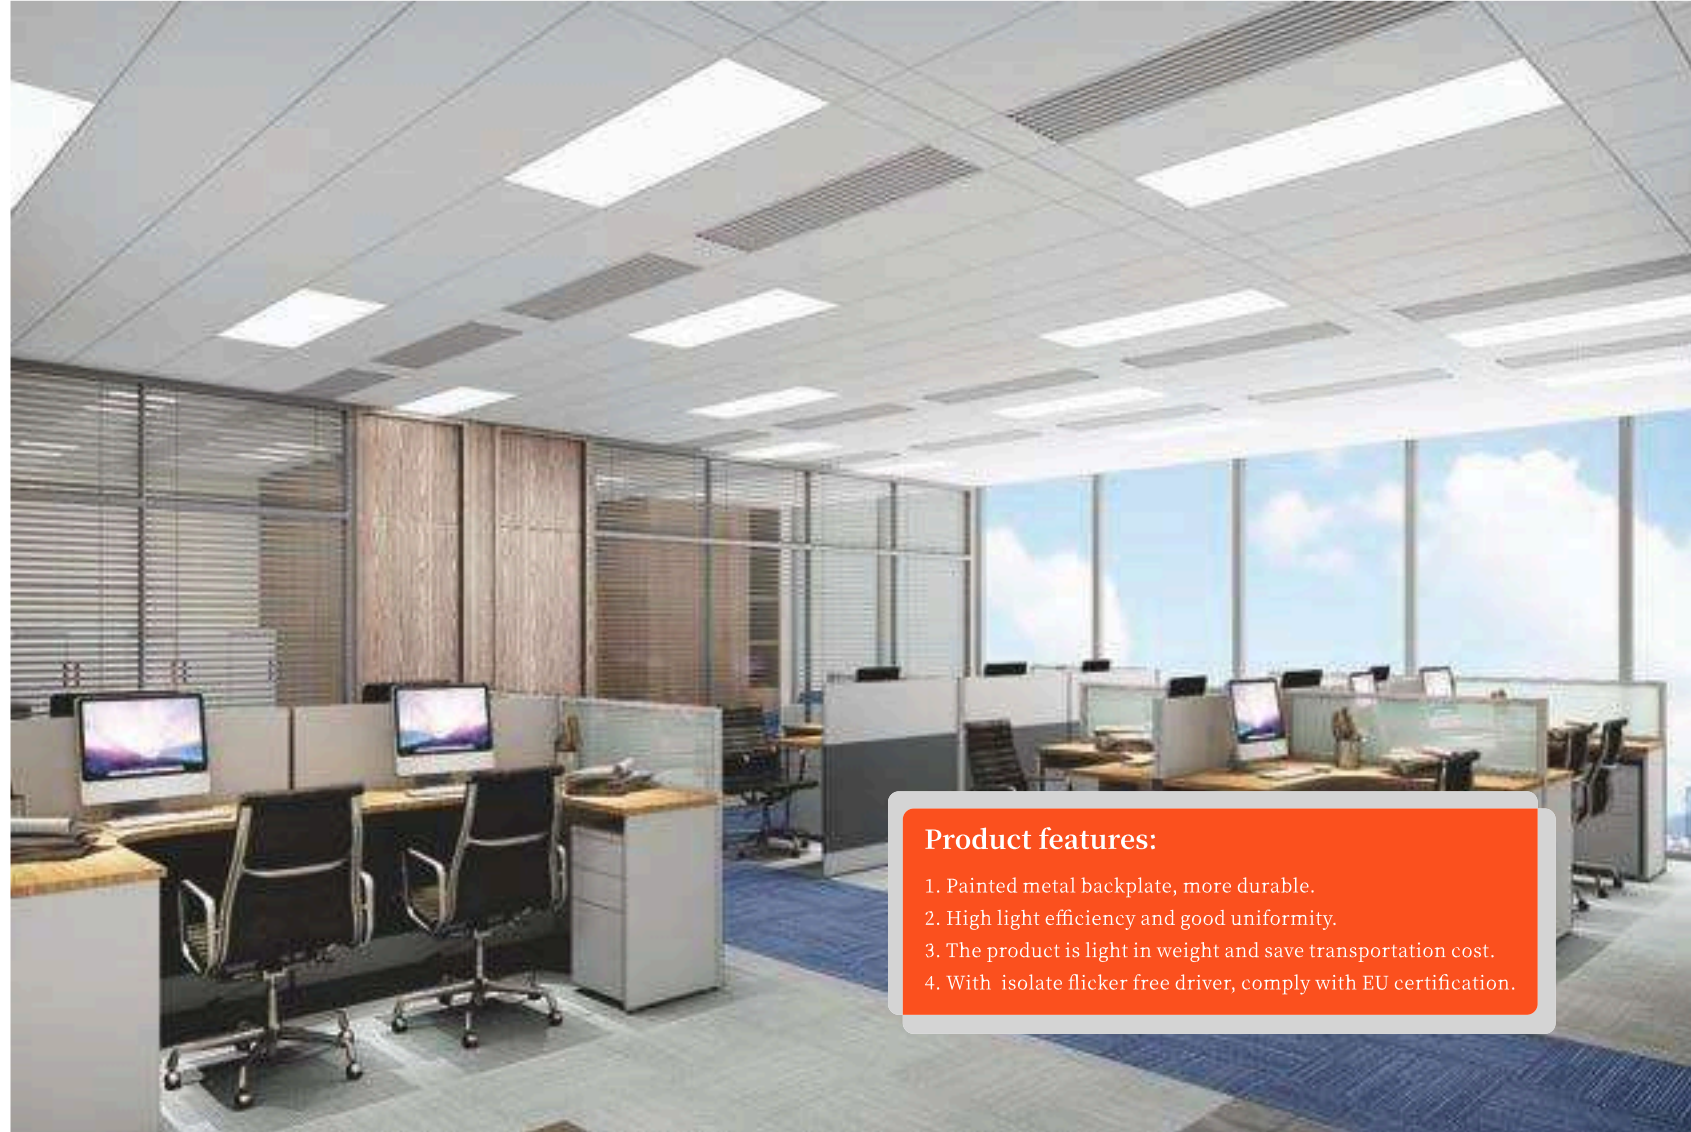

Product features:

1. Painted metal backplate, more durable.
2. High light efficiency and good uniformity.
3. The product is light in weight and save transportation cost.
4. With isolate flicker free driver, comply with EU certification.

► High light Efficiency Back-lit LED Panel Light

Certification : TUV / CE / ROHS / ERP / SAA
Angle : 120°
Voltage : AC220-240V 50/60Hz
IP Rating : IP20
LED Driver : Isolated, Flicker free




100lm/W Back-lit LED Panel Light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F5959-36	36	595*595*30	100	5 years
BQ-FPL-F5959-40	40	595*595*30	100	5 years
BQ-FPL-F29119-36	36	295*1195*30	100	5 years
BQ-FPL-F29119-40	40	295*1195*30	100	5 years
BQ-FPL-F59119-60	60	595*1195*30	100	5 years




120lm/W Back-lit LED Panel Light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F5959-36	36	595*595*30	120	5 years
BQ-FPL-F5959-40	40	595*595*30	120	5 years
BQ-FPL-F29119-36	36	295*1195*30	120	5 years
BQ-FPL-F29119-40	40	295*1195*30	120	5 years
BQ-FPL-F59119-60	60	595*1195*30	120	5 years



140lm/W Back-lit LED Panel Light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F5959-36	36	595*595*30	140	5 years
BQ-FPL-F5959-40	40	595*595*30	140	5 years
BQ-FPL-F29119-36	36	295*1195*30	140	5 years
BQ-FPL-F29119-40	40	295*1195*30	140	5 years
BQ-FPL-F59119-60	60	595*1195*30	140	5 years

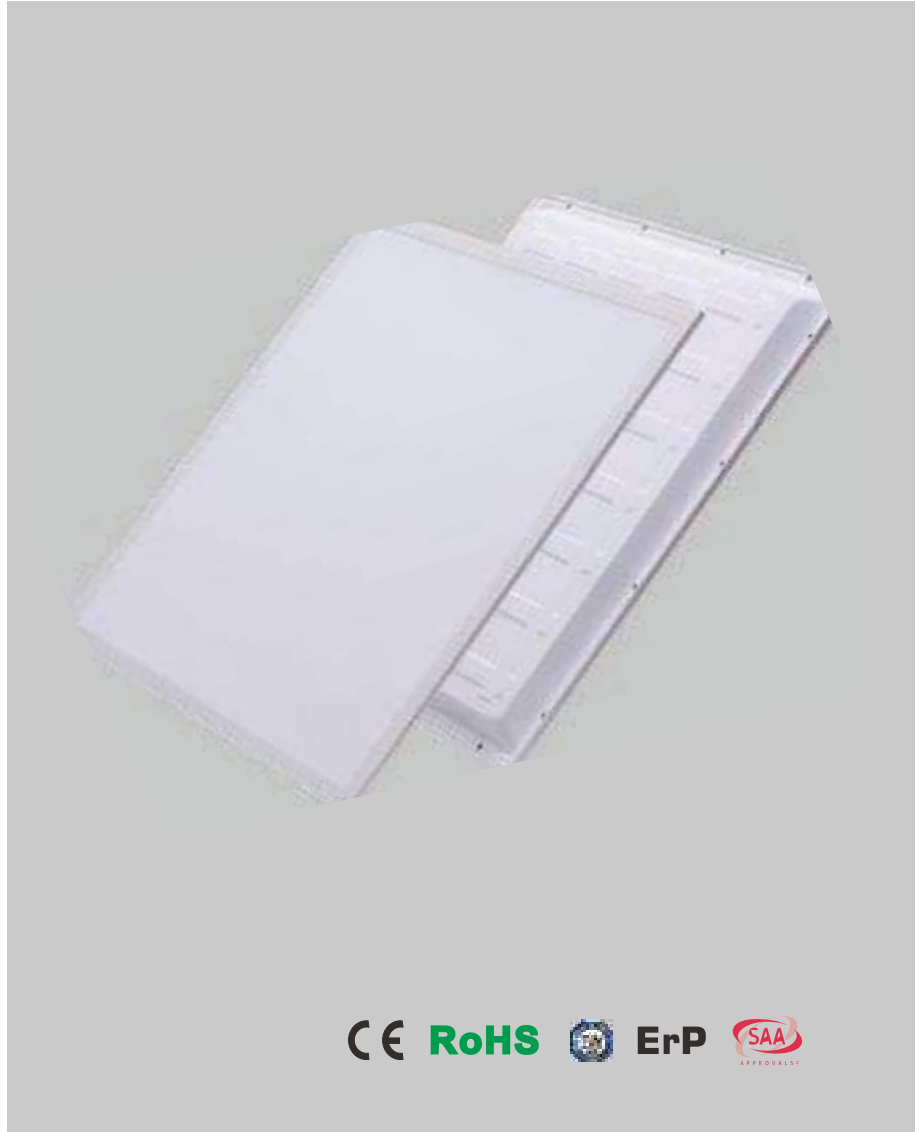

CE RoHS ErP SAA APPROVALS

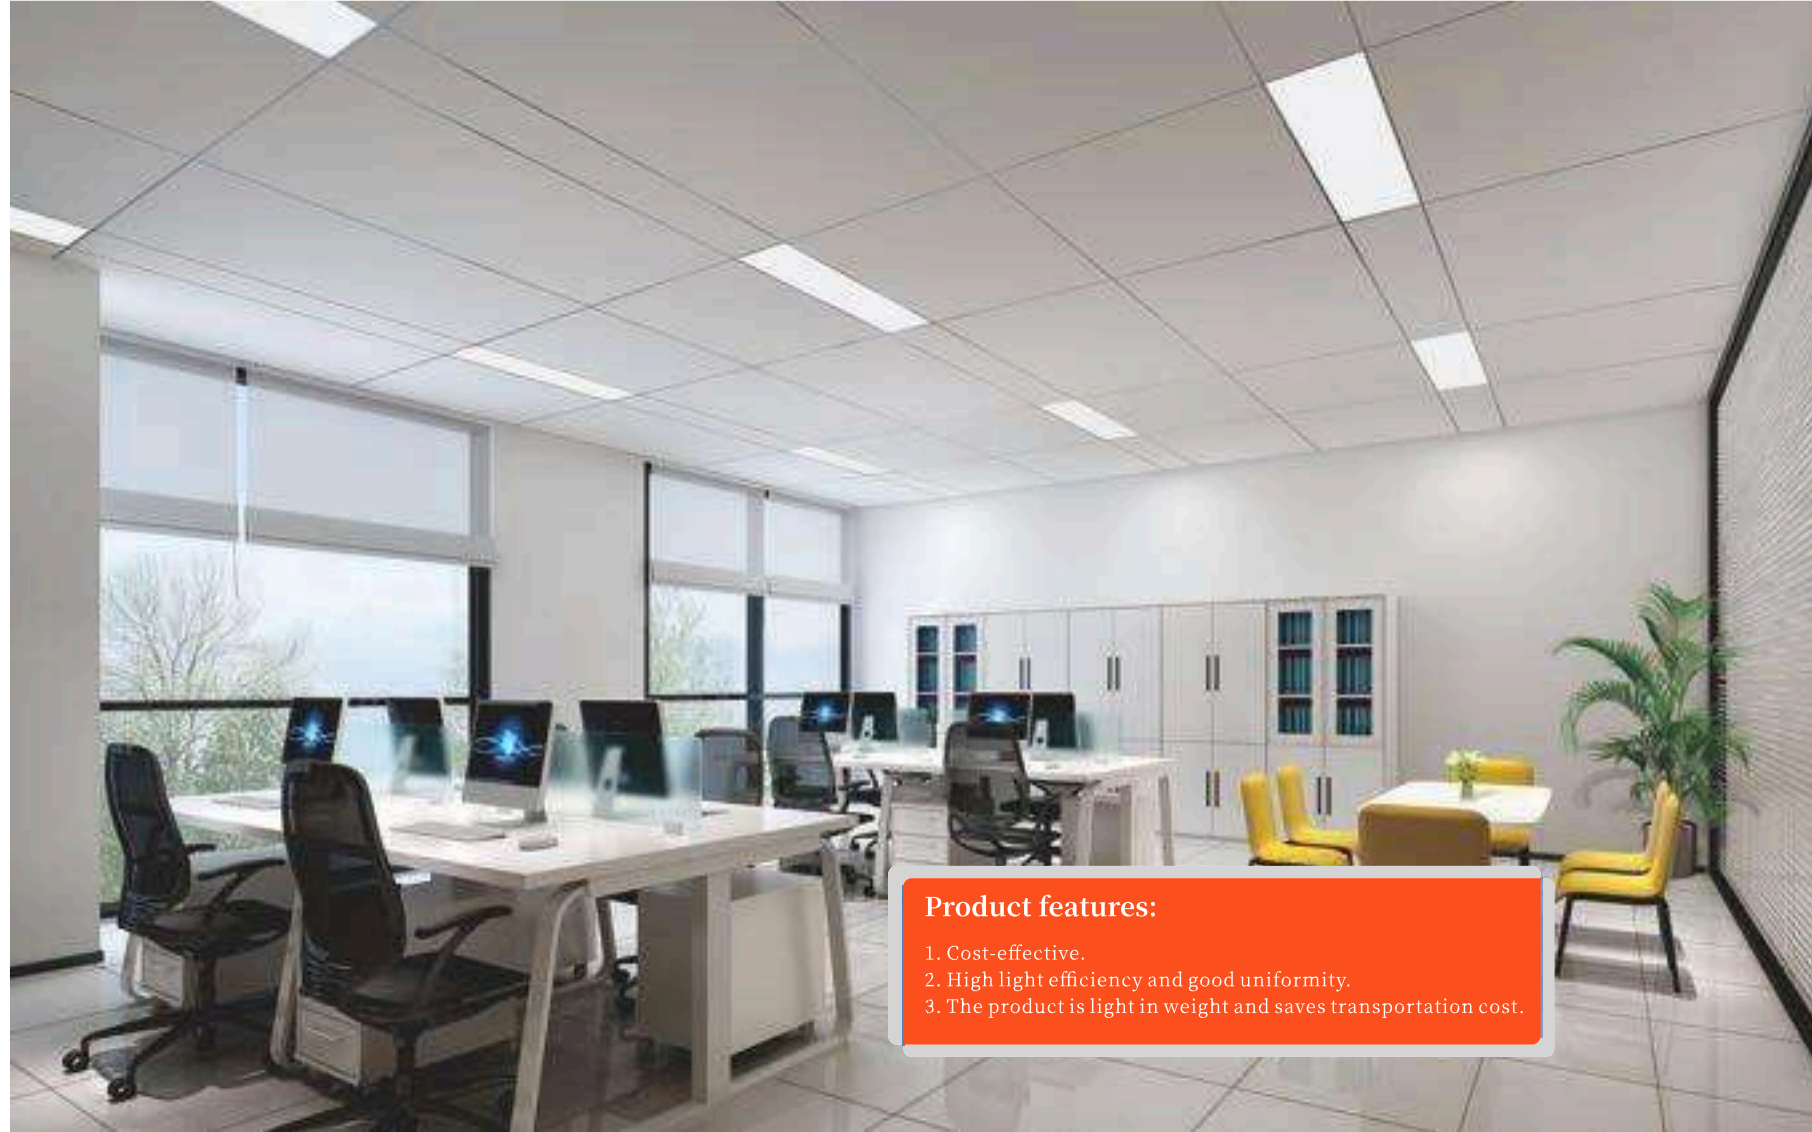

Product features:

1. Cost-effective.
2. High light efficiency and good uniformity.
3. The product is light in weight and saves transportation cost.

► High Light Efficiency Non-Isolated Back-lit Panel Light

Certification : CE / ROHS
 Angle : 120°
 Voltage : AC220-240V 50/60Hz
 IP Rating : IP20
 LED Driver : Non-Isolated, Flicker free




100lm/W Non-Isolated Back-lit panel light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F2959-25-F	25	295*595*30	100	3 years
BQ-FPL-F5959-36-F	36	595*595*30	100	3 years
BQ-FPL-F29119-36-F	36	295*1195*30	100	3 years
BQ-FPL-F59119-48-F	48	595*1195*30	100	3 years
BQ-FPL-F59119-60-F	60	595*1195*30	100	3 years



130lm/W Non-Isolated Back-lit panel light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F2959-25-F	25	295*595*30	130	3 years
BQ-FPL-F5959-36-F	36	595*595*30	130	3 years
BQ-FPL-F29119-36-F	36	295*1195*30	130	3 years
BQ-FPL-F59119-48-F	48	595*1195*30	130	3 years
BQ-FPL-F59119-60-F	60	595*1195*30	130	3 years



CE RoHS

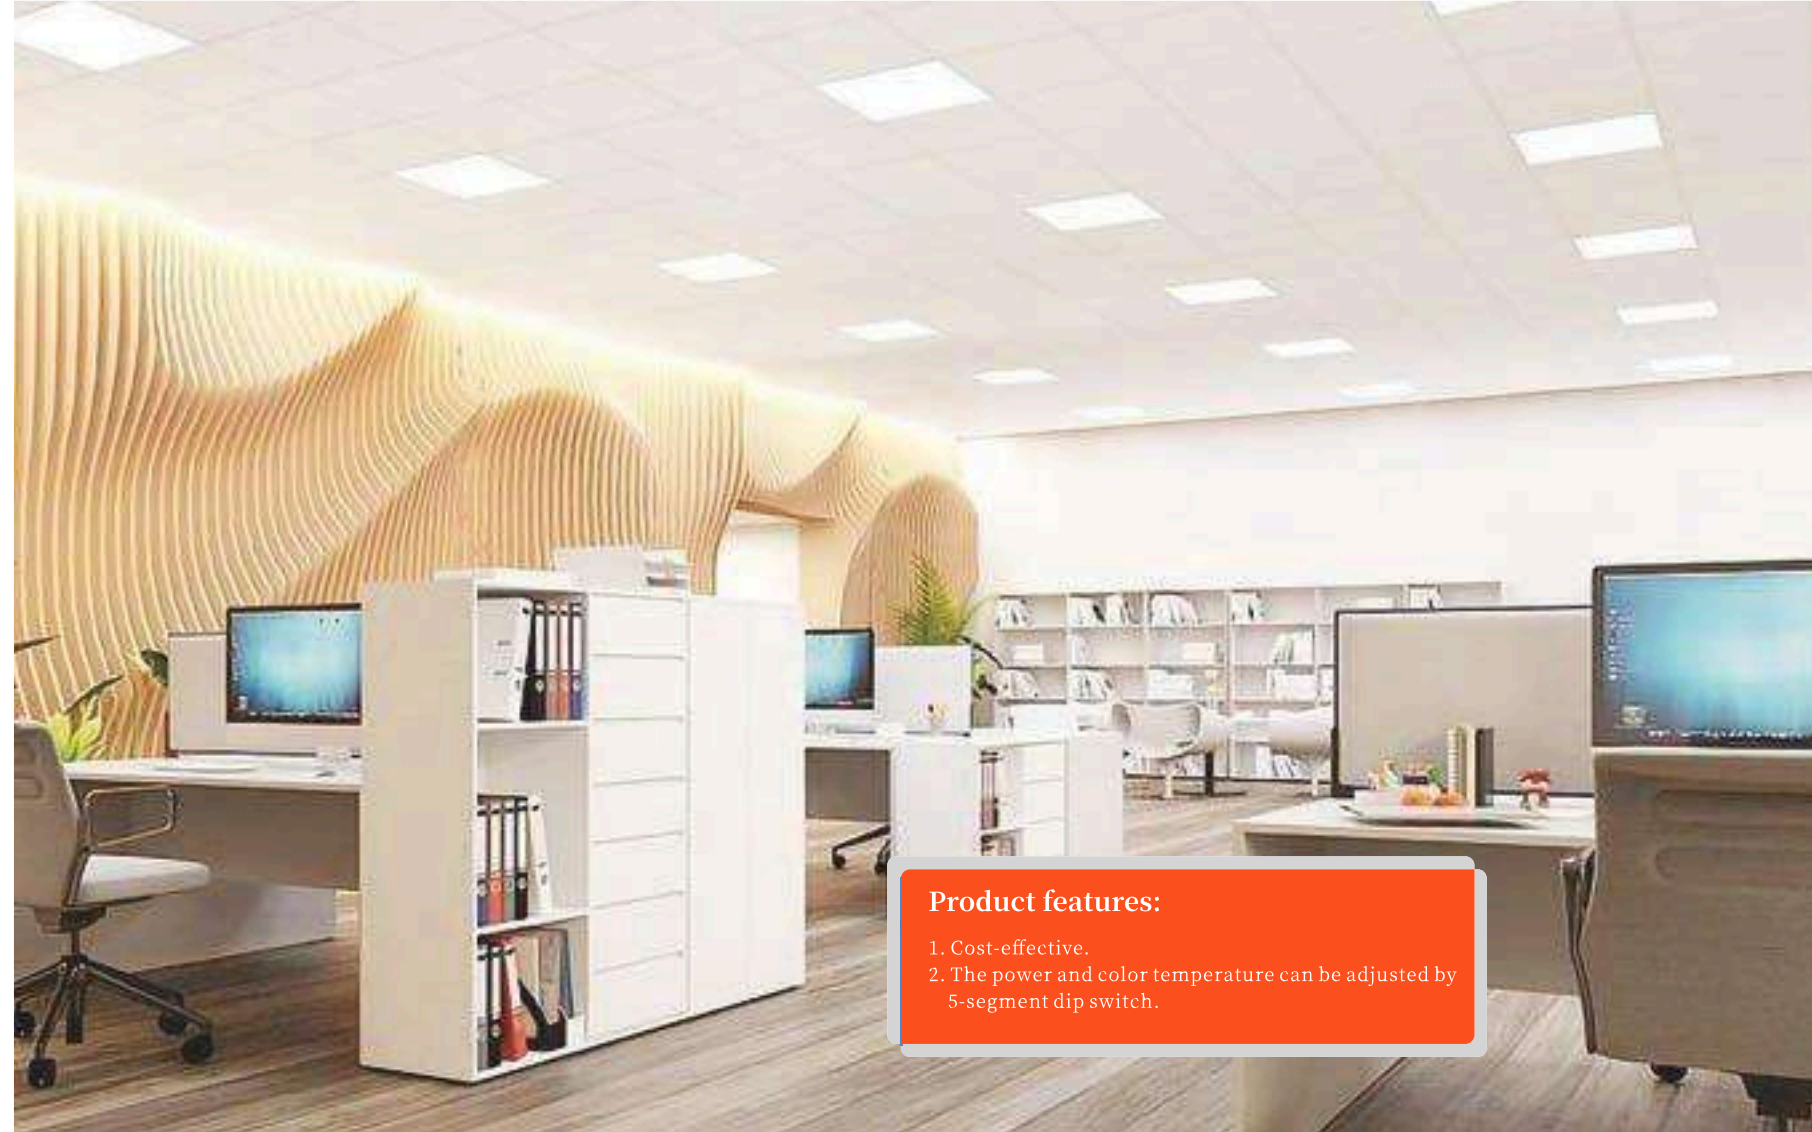

Product features:

1. Cost-effective.
2. The power and color temperature can be adjusted by 5-segment dip switch.

► Non-Isolated Back-lit CCT Panel Light


Certification : CE / ROHS
 Angle : 120°
 Voltage : AC220-240V 50/60Hz
 IP Rating : IP20
 LED Driver : Non Isolated, Flicker free



Non isolate Back-lit CCT panel light					
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty	
BQ-FPL-F2959-20-CCT-F	20	295*595*30	120	3 years	
BQ-FPL-F5959-40-CCT-F	40	595*595*30	120	3 years	
BQ-FPL-F29119-40-CCT-F	40	295*1195*30	120	3 years	
BQ-FPL-F59119-48-CCT-F	48	595*1195*30	120	3 years	




CE RoHS

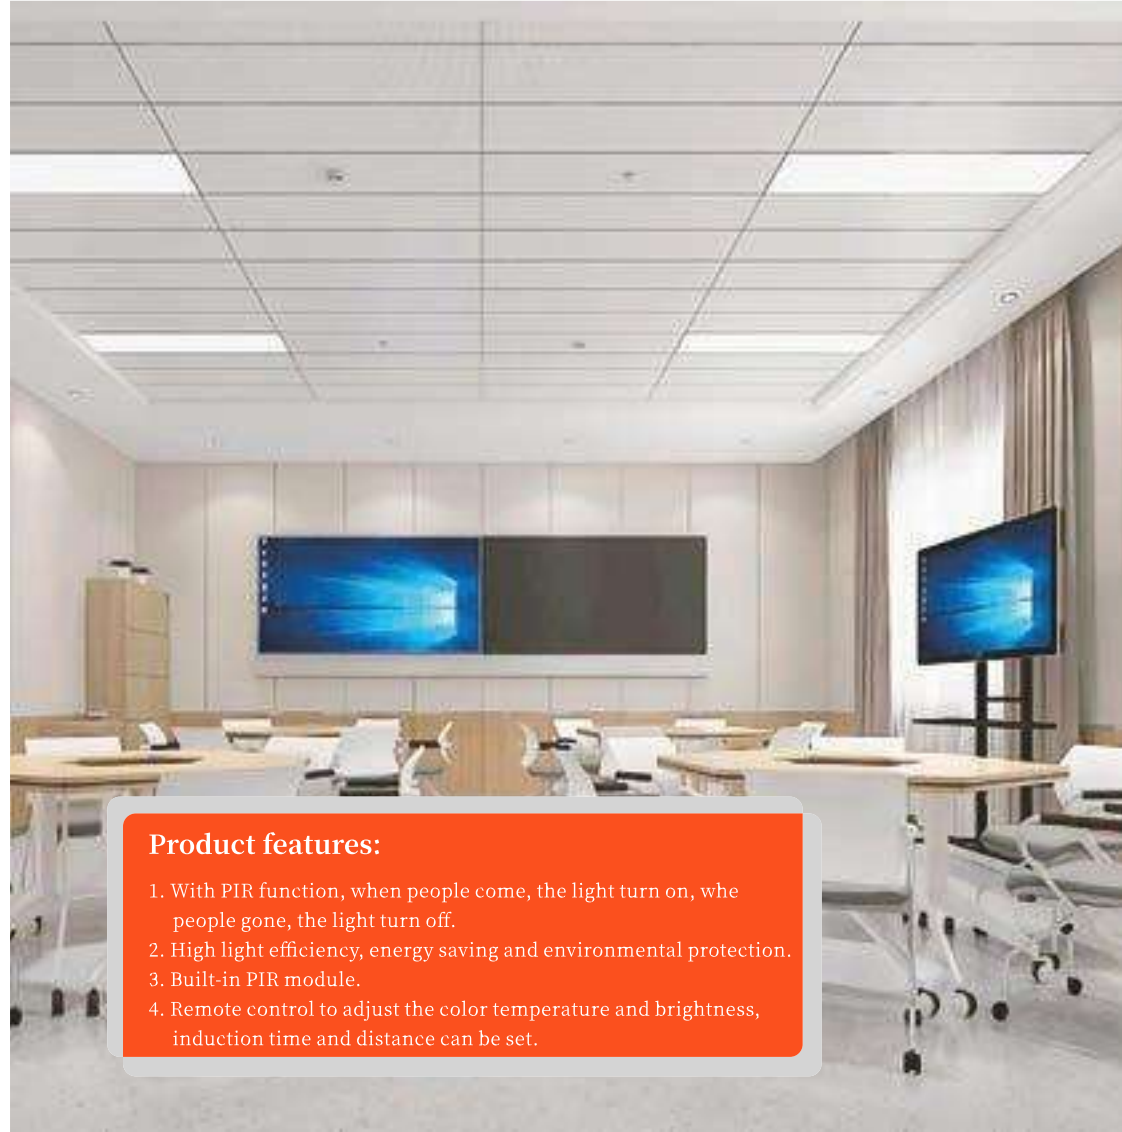


- Product features:**
1. With PIR function, when people come, the light turn on, when people gone, the light turn off.
 2. High light efficiency, energy saving and environmental protection.
 3. Built-in PIR module.
 4. Remote control to adjust the color temperature and brightness, induction time and distance can be set.


► **Photosensitive function is on:**

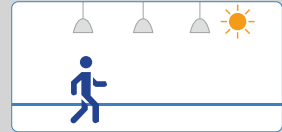

When the ambient light is bright enough, the light will not automatically turn on.

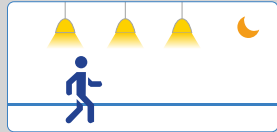

When ambient light falls below a preset threshold, the light lights up automatically when the sensor detects a moving object.

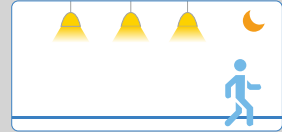

After the moving object leaves, the sensor will enter the delay time when it cannot detect the moving object.




After the preset delay time, the light will automatically turn off.

► **Photosensitive function is off:**



No moving objects can be detected, the lamp turn off.

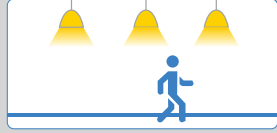

When the sensor detects a moving object, the light automatic turn on at 100% brightness.




When the sensor didn't detect any moving object, the lamp will turn off.

► **Non-Isolated Back-lit SR Panel Light**

Certification : CE / ROHS
Angle : 120°
Voltage : AC220-240V 50/60Hz
IP Rating : IP20
LED Driver : Non-Isolated, Flicker free



Non isolate Back-lit SR panel light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F2959-20-F-SR	20	295*595*30	120lm/W	3 years
BQ-FPL-F5959-40-F-SR	40	595*595*30	140lm/W	3 years
BQ-FPL-F29119-40-F-SR	40	295*1195*30	140lm/W	3 years
BQ-FPL-F59119-60-F-SR	60	595*1195*30	140lm/W	3 years

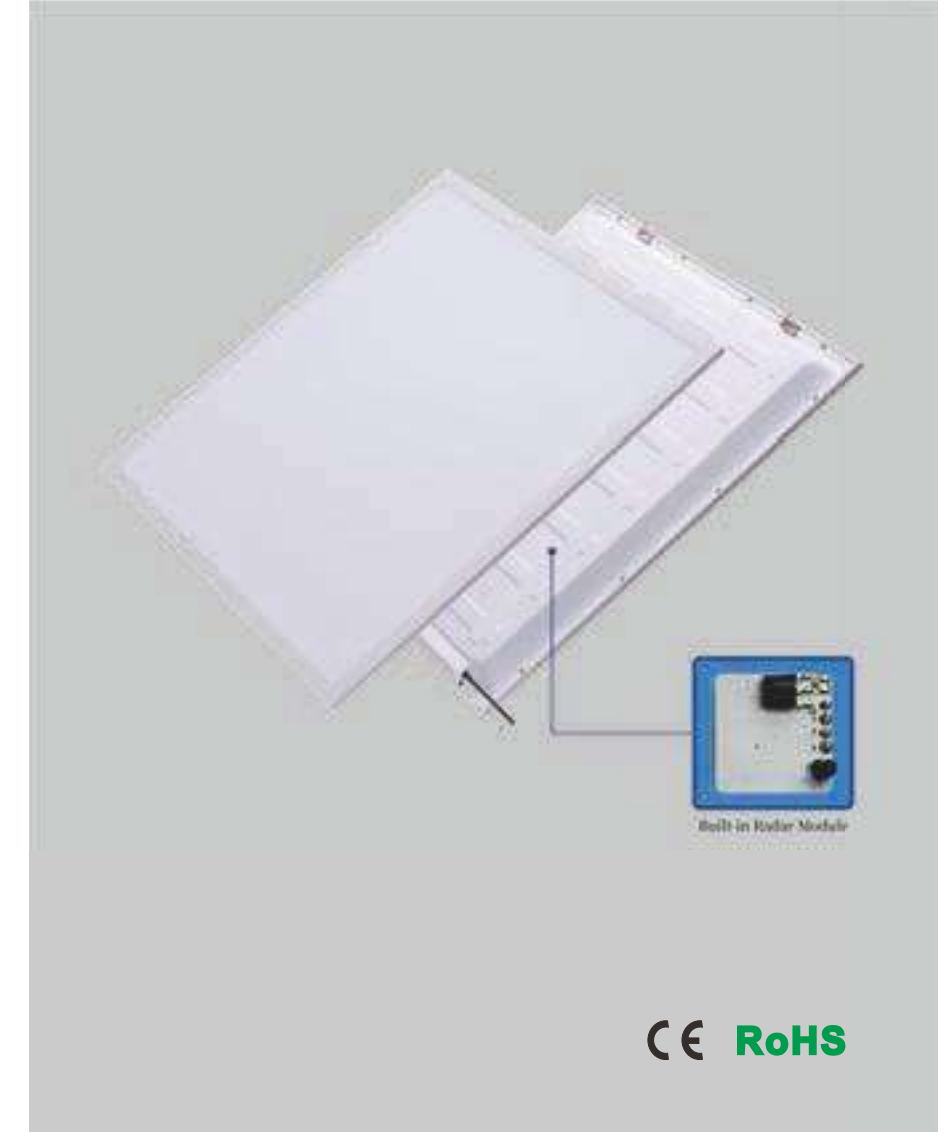

CE RoHS



Product features:


1. Can realize the set of color temperature adjustable, brightness dimmable, also, available for all kinds of lighting scenes.
2. Works with the Google assistant and Amazon alexa.
3. Can realize the set of Timing and Power on/off.
4. Group management: General control, Branch control, Scene control.

► LED RGB+CCT Smart Panel Light

Certification : CE / ROHS / RED
Angle : 120°
Voltage : AC100-240V 50/60Hz
IP Rating : IP20
LED Driver : Isolated, Flicker free

LED RGB+CCT Smart Panel Light				
Model	Power+R+G+B(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F2959-25-RGBCW-WIFI	25+2+3+3	295*595*30	80-90lm/W	3 years
BQ-FPL-F5959-40-RGBCW-WIFI	40+6+6+6	595*595*30	90-100lm/W	3 years
BQ-FPL-F29119-40-RGBCW-WIFI	40+6+9+9	295*1195*30	90-100lm/W	3 years



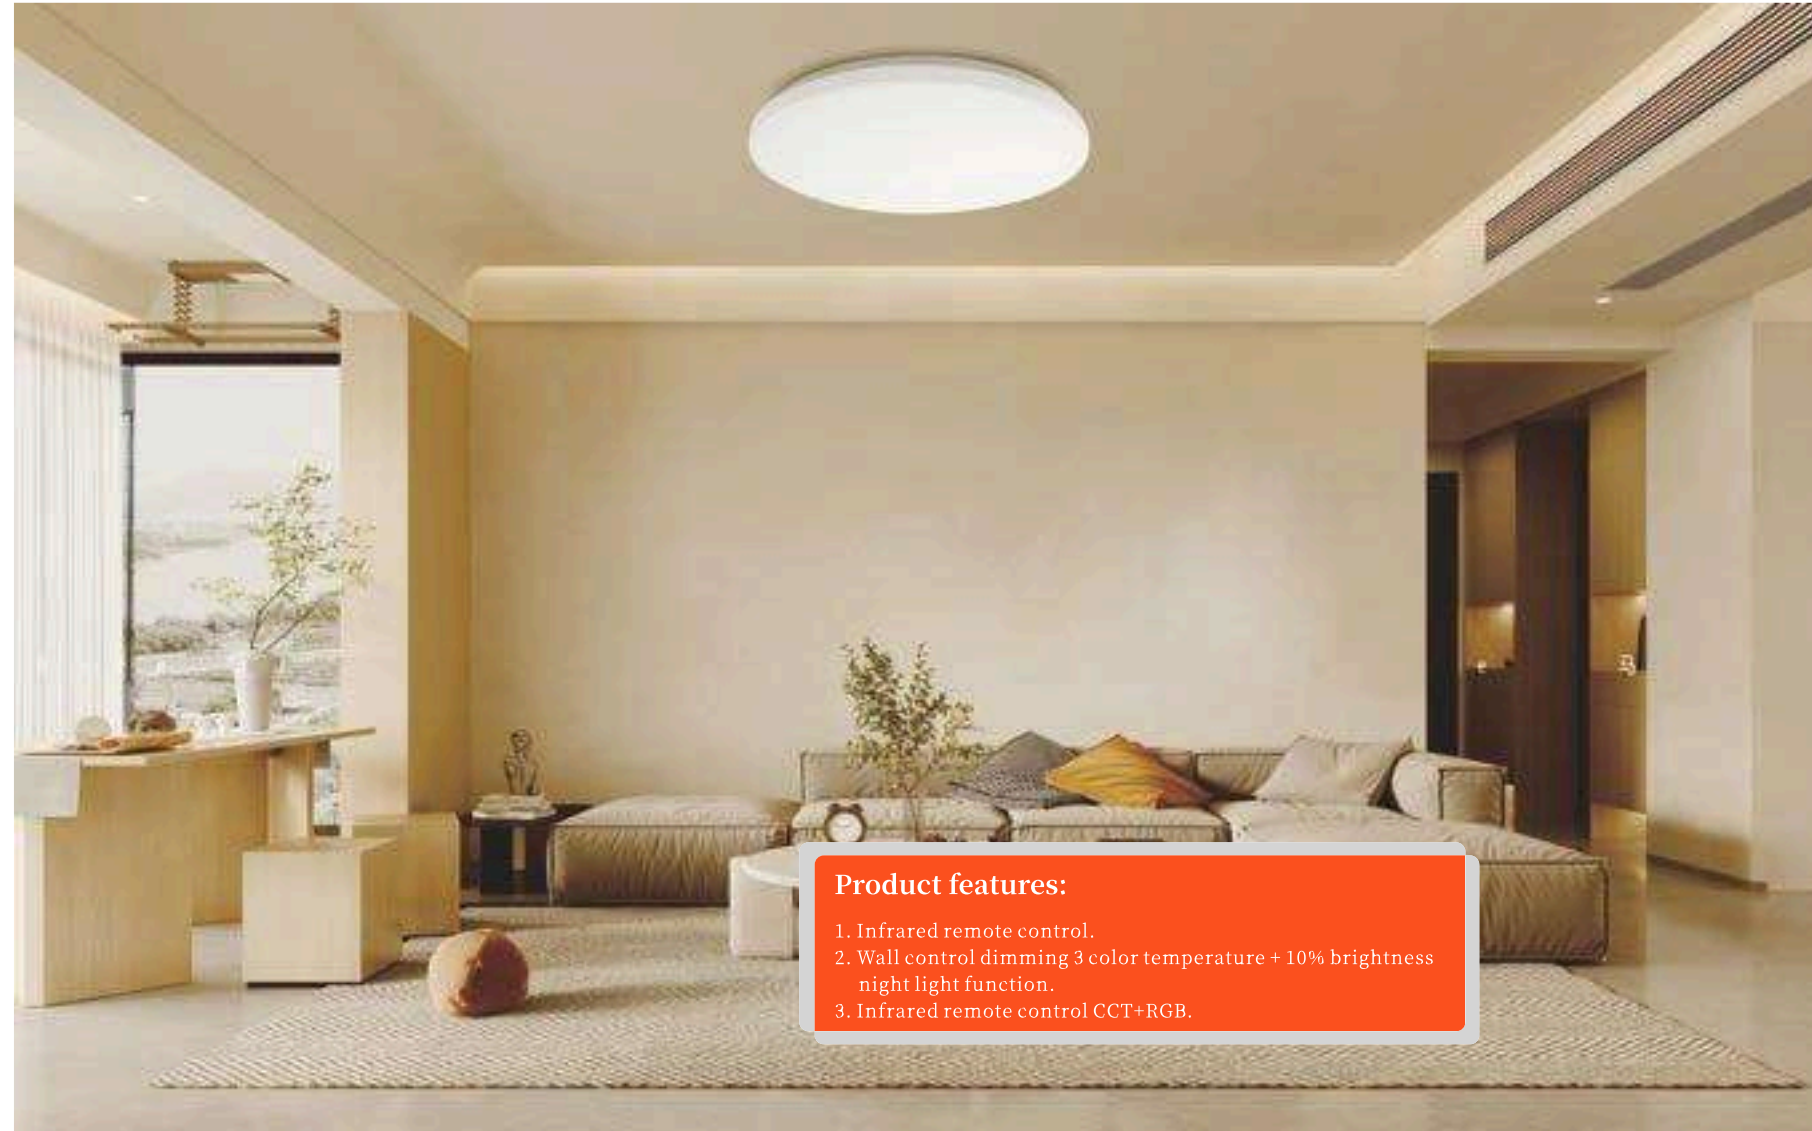

Product features:

1. Infrared remote control.
2. Wall control dimming 3 color temperature + 10% brightness night light function.
3. Infrared remote control CCT+RGB.

► Smart Ceiling Light

Certification : CE / RoHS
Angle : 120°
Voltage : AC200-240V 50/60Hz
IP Rating : IP20
CCT : RGB+CCT



Smart ceiling light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-X3333-24/40	3000K/24W	330*330*65	120	2years
	4000K/40W			
	6500K/24W			



Smart ceiling light				
Model	Power+RGB(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-X3333-23-RGBCW-IR	23+2.5	330*330*65	120	2years
BQ-YPL-X3333-23-RGBCW-IR	23+2.5	Ø330*65	120	2years
BQ-FPL-X4343-36-RGBCW-IR	36+2.5	430*430*65	120	2years
BQ-YPL-X4343-36-RGBCW-IR	36+2.5	Ø430*65	120	2years



CE RoHS



Product features:

1. Can realize the set of color temperature adjustable, brightness dimmable,also, available for all kinds of lighting scenes.
2. Works with the Google assistant and Amazon alexa.
3. Can realize the set of Timing and Power on/off.
4. Group management: General control, Branch control, Scene control.


► **Smart Ceiling Light**

Certification : CE / RoHS
Angle : 120°
Voltage : AC200-240V 50/60Hz
IP Rating : IP20
CCT : RGB+CCT



Smart ceiling light					
Model	Power+RGB(W)	Dimension(mm)	Light Effect(lm/W)	Warranty	
BQ-FPL-X3333-RGBCW-WIFI	23+2	330*330*65	120	2 years	
BQ-FPL-X4343-RGBCW-WIFI	36+3	430*430*65	120	2 years	
BQ-YPL-X3333-RGBCW-WIFI	23+2	Ø330*65	120	2 years	
BQ-YPL-X4343-RGBCW-WIFI	36+3	Ø430*65	120	2 years	



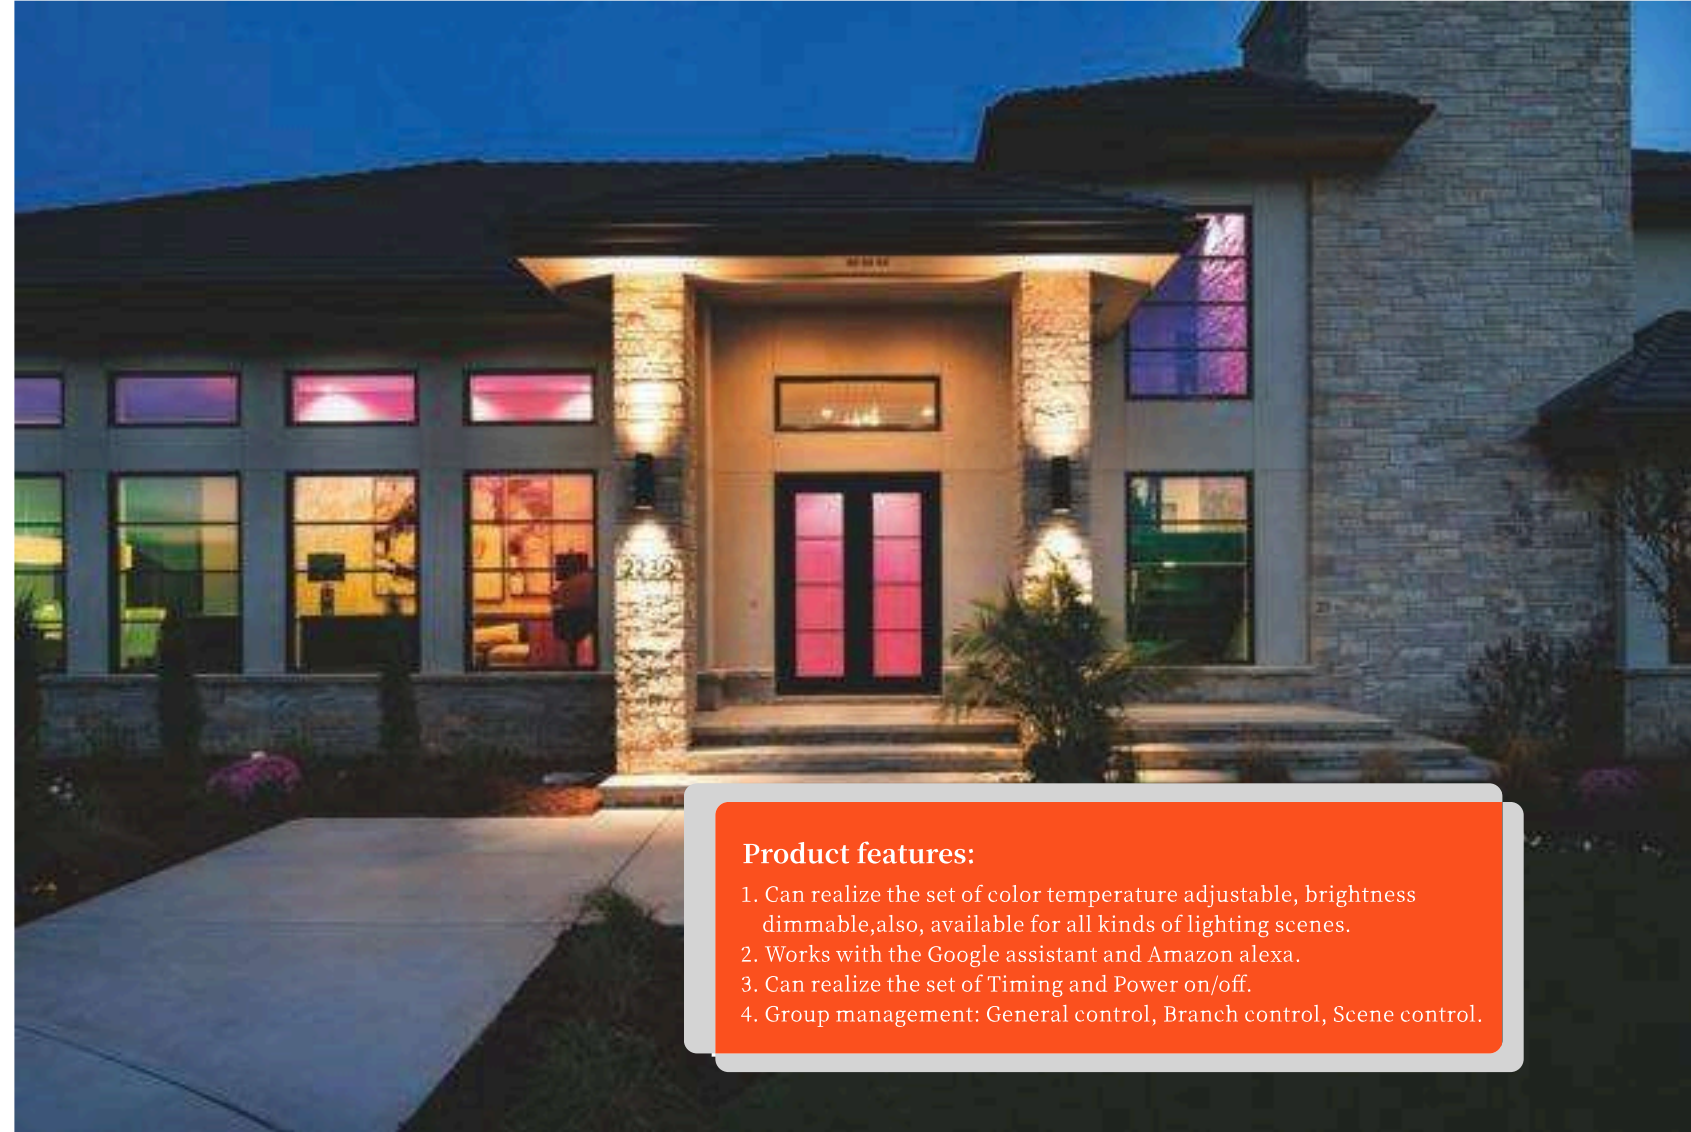

Product features:


1. Can realize the set of color temperature adjustable, brightness dimmable,also, available for all kinds of lighting scenes.
2. Works with the Google assistant and Amazon alexa.
3. Can realize the set of Timing and Power on/off.
4. Group management: General control, Branch control, Scene control.

► **TUYA Smart Recessed LED Panel Light**

Certification: CE/ROHS
 Angle: 120°
 Voltage: AC220-240V 50/60Hz
 IP Rating: IP20
 Light color: RGB+CCT



TUYA Smart Recessed LED Panel Light					
Model	Power+RGB(W)	Size (mm)	Light Effect(lm/W)	Warranty	
BQ-YPL-J120-9-RGBCW-WIFI	9+2	Ø120	60	3 years	
BQ-YPL-J175-12-RGBCW-WIFI	12+2	Ø175	70	3 years	
BQ-YPL-J225-18-RGBCW-WIFI	18+3	Ø225	80	3 years	

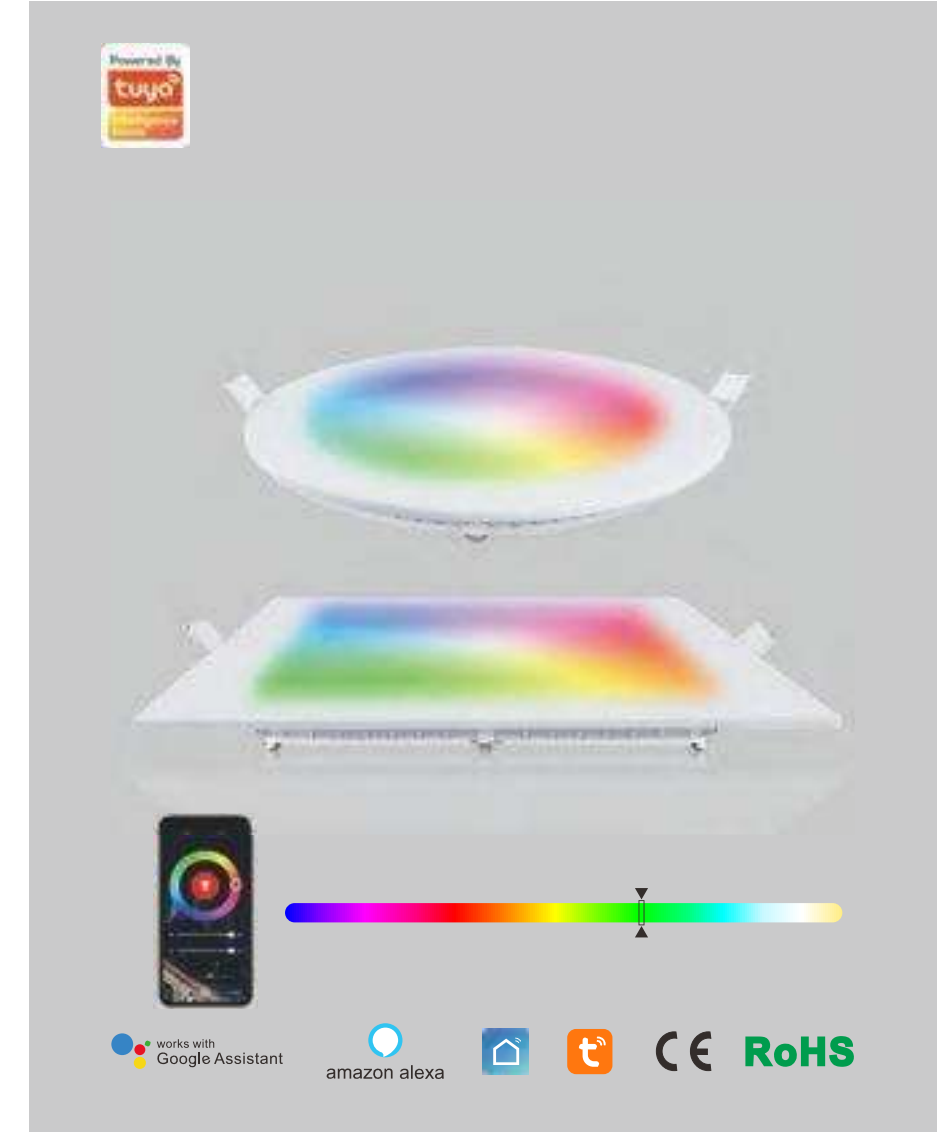



Product features:

1. The product can be controlled by Tuya APP.
2. Color temperature, light and shade of the frontside light source can be adjusted. The back side is the ambient auxiliary light source.
3. Support a variety of digital RGB effect.
4. Support music rhythm function, provide more colorful indoor lighting effect.
5. Support voice control of speakers such as Amazon and Tmall Genie.

▶ Round Ambient Ceiling Light

Certification: ETL/FCC
Angle : 120°
Voltage : AC110-130V 50/60Hz
IP Rating : IP20
Dimming : RGB+CCT



Round ambient ceiling light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-FW300-24	24W+3	Ø300	85-100	3 years







Product features:


1. Human lighting, lights automatically adjust with the time of day.
2. Keep light wavelengths up to 480nm during the day to suppress melatonin secretion.
3. Automatic adjustment at night to maintain light wavelength below 480 nm, minimizing alertness and Let your body relax and rest.

▶ Human Centric LED Backlit Panel Light

Certification : CE / ROHS
Angle : 120°
Voltage : AC100-240V 50/60Hz
IP Rating : IP20
LED Driver : Isolated, Flicker free

LED HCL Backlit Panel Light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F2959-25-HCL	25	295*595*30	80lm/W	3 years
BQ-FPL-F5959-36-HCL	36	595*595*30	100lm/W	3 years
BQ-FPL-F29119-36-HCL	36	295*1195*30	100lm/W	3 years
BQ-FPL-F59119-60-HCL	60	595*1195*30	100lm/W	3 years

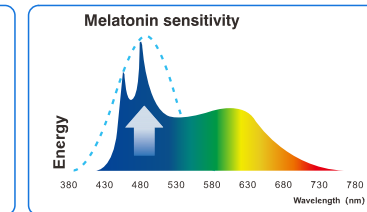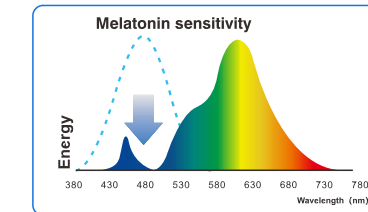

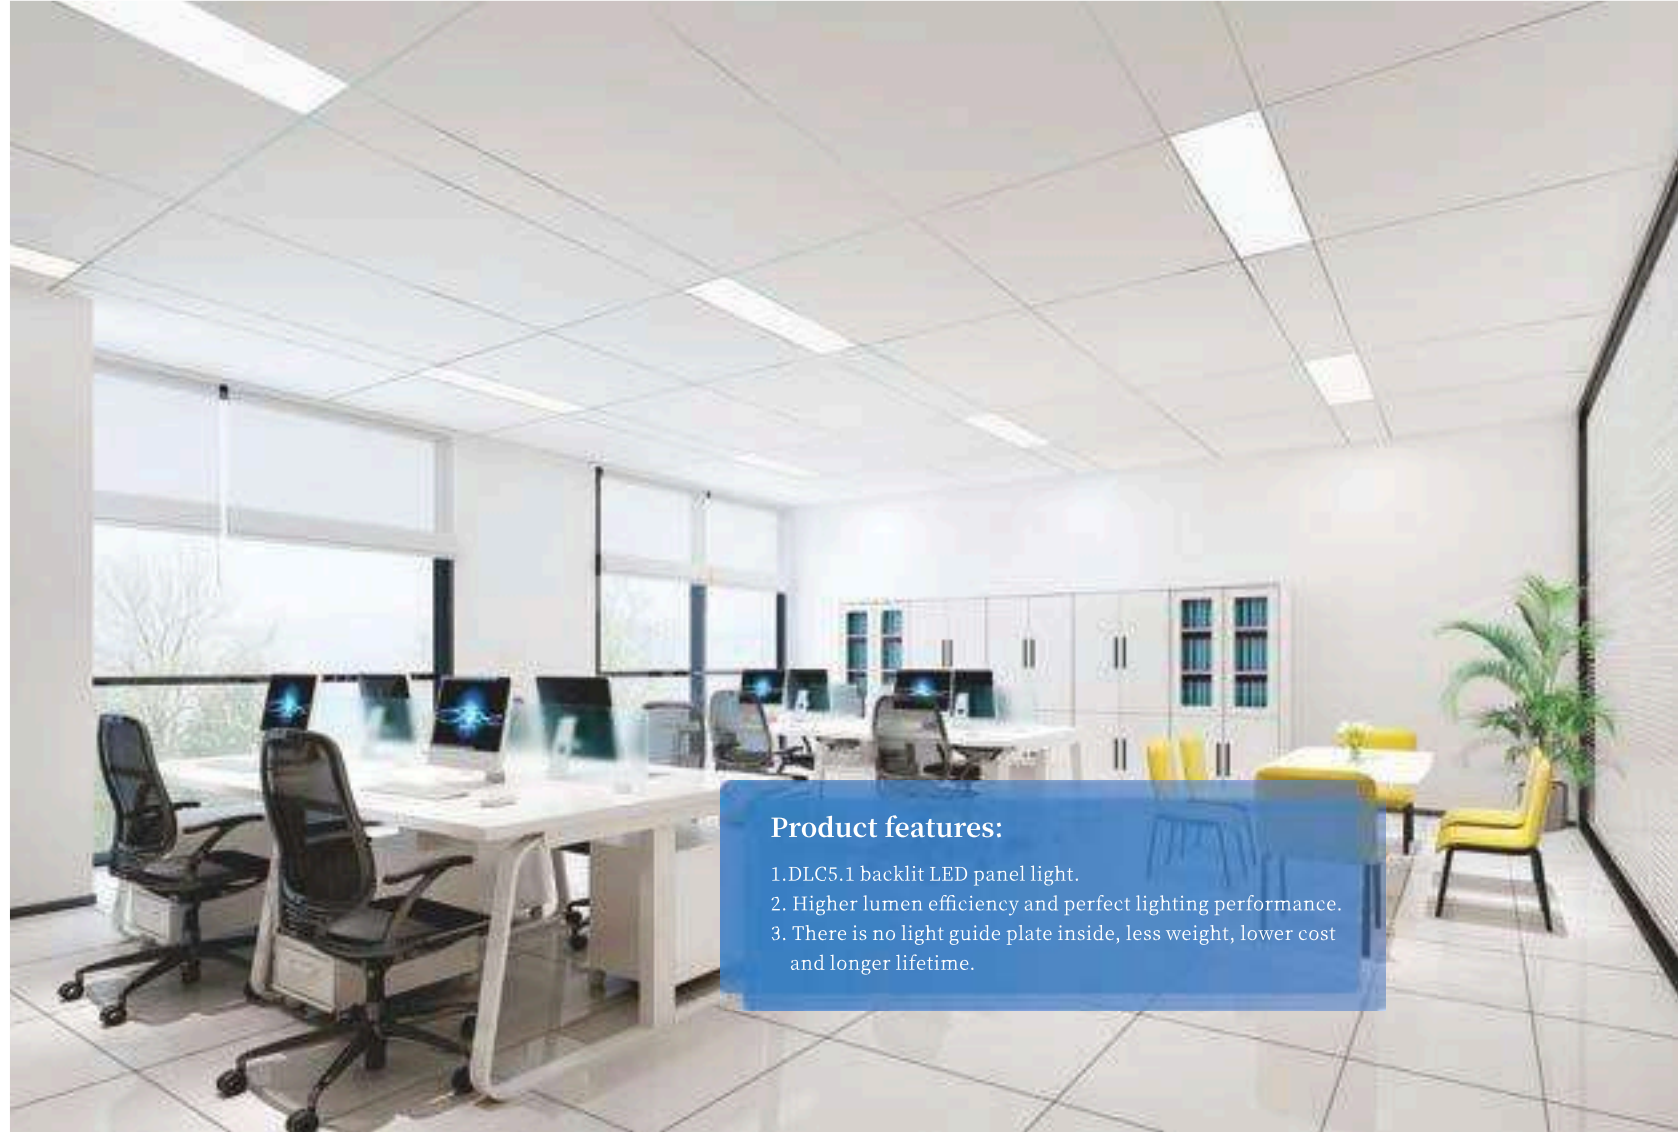

Product features:


1. DLC5.1 backlit LED panel light.
2. Higher lumen efficiency and perfect lighting performance.
3. There is no light guide plate inside, less weight, lower cost and longer lifetime.

► DLC5.1 Premium Back-lit LED Panel Light


Certification : ETL / DLC / FCC
 Angle : 120°
 Voltage : AC120-277V or 120-347V 50/60Hz
 IP Rating : IP20
 LED Driver : 3Watts & 3CCT, 5Watts & 5CCT




DLC5.1 Premium Back-lit LED Panel Light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F1X4-40XX-M	40	303*1213*30 (1'x4')	125	5 years
BQ-FPL-F2X2-40XX-M	40	603*603*30 (2'x2')	125	5 years
BQ-FPL-F2X4-50XX-M	50	603*1213*30 (2'x4')	125	5 years



DLC5.1 Premium Back-lit LED Panel Light(120-277V)				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F1X4-yykk-N	20/30/40	303*1213*30 (1'x4')	125	5 years
BQ-FPL-F2X2-yykk-N	20/30/40	603*603*30 (2'x2')	125	5 years
BQ-FPL-F2X4-yykk-N	30/40/50	603*1213*30 (2'x4')	125	5 years




DLC5.1 Premium Back-lit LED Panel Light(120-347V)				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F1X4-yykk-Z	20/30/40	303*1213*30 (1'x4')	125	5 years
BQ-FPL-F2X2-yykk-Z	20/30/40	603*603*30 (2'x2')	125	5 years
BQ-FPL-F2X4-yykk-Z	30/40/50	603*1213*30 (2'x4')	125	5 years



DLC5.1 Premium Back-lit LED Panel Light(5Watts & 5CCT)				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-F1X4-yykk-Z	15/20/30/40/50	303*1213*30 (1'x4')	125	5 years
BQ-FPL-F2X2-yykk-Z	15/20/30/40/50	603*603*30 (2'x2')	125	5 years
BQ-FPL-F2X4-yykk-Z	20/30/40/50/60	603*1213*30 (2'x4')	125	5 years



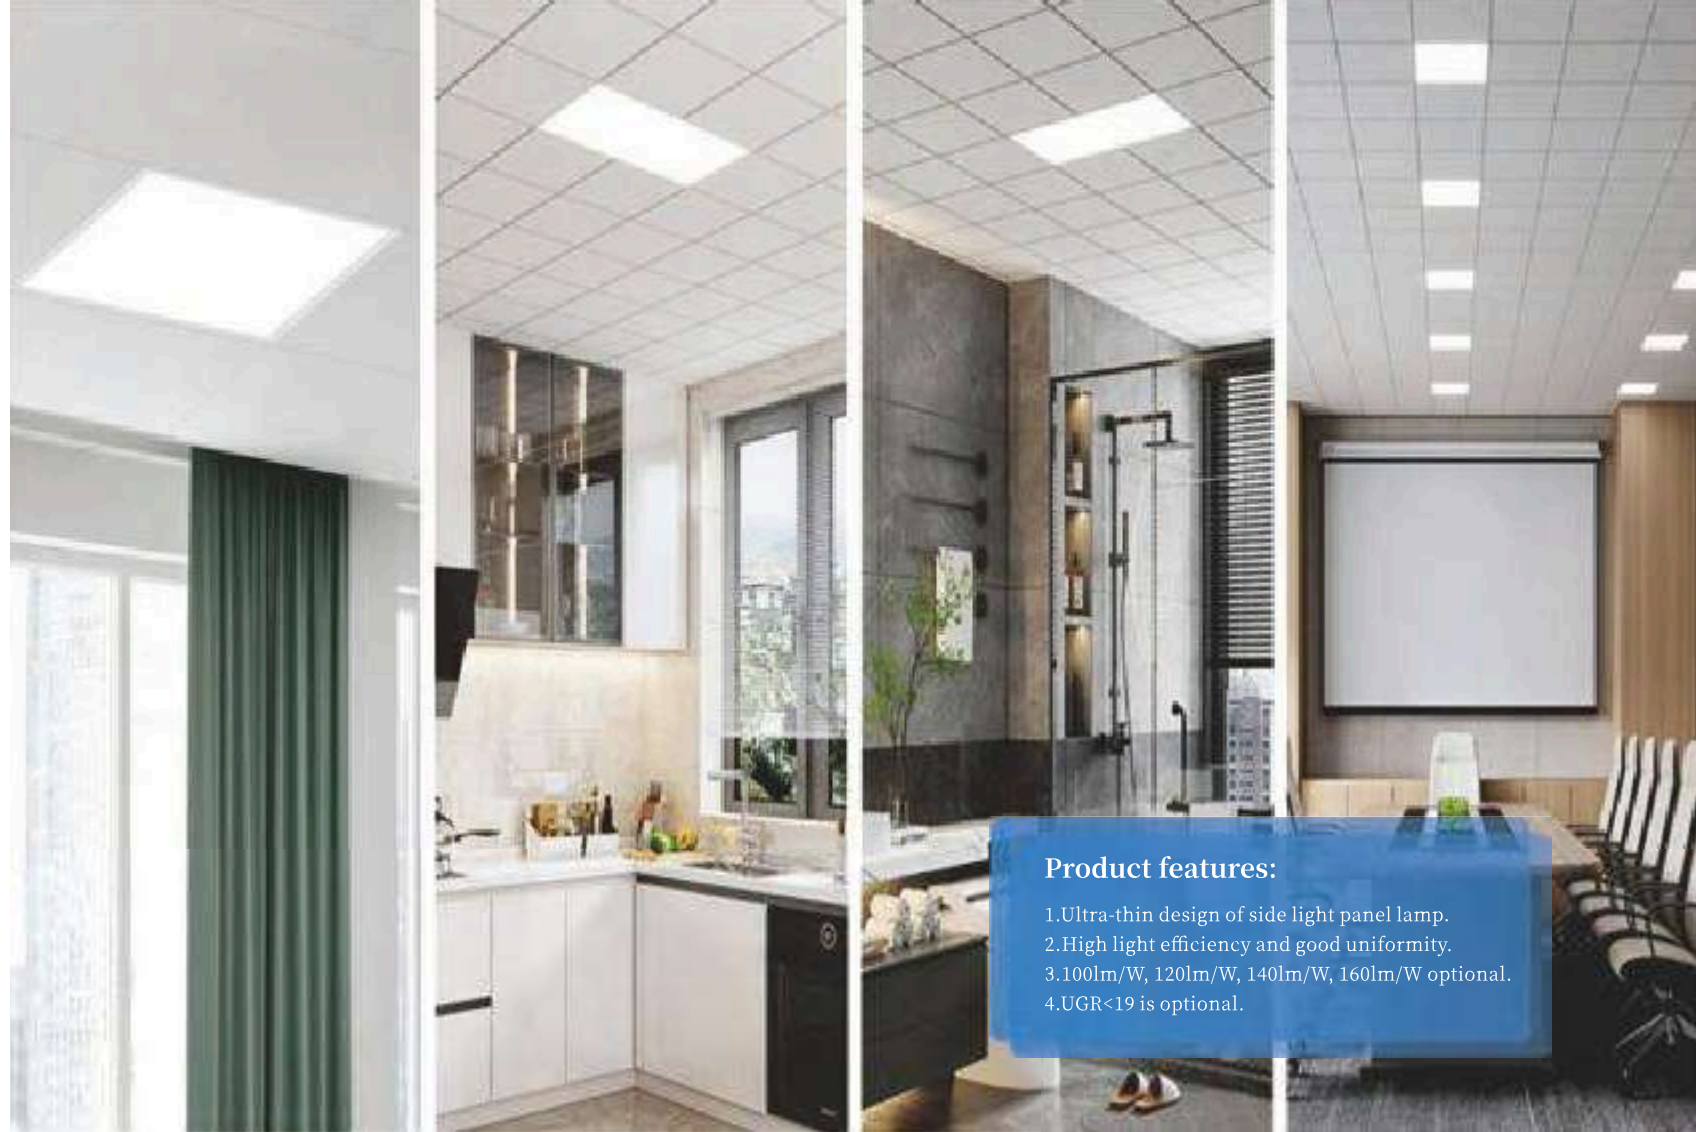

Product features:


- 1.Ultra-thin design of side light panel lamp.
- 2.High light efficiency and good uniformity.
- 3.100lm/W, 120lm/W, 140lm/W, 160lm/W optional.
- 4.UGR<19 is optional.

► X5 Edgelit LED Panel Light

Certification : CE / RoHS / TUV / SAA
Angle : 120°
Voltage : AC200-240V 50/60Hz
IP Rating : IP20
CCT : 2700-6500K



X5 Edgelit LED Panel Light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-2929-20W	20	295*295*9.8	100	5 years
BQ-FPL-2959-25W	25	295*595*9.8	100	5 years
BQ-FPL-5959-36W	36	595*595*9.8	100	5 years
BQ-FPL-29119-36W	36	295*1195*9.8	100	5 years
BQ-FPL-59119-60W	60	595*1195*9.8	100	5 years
BQ-FPL-6262-40W	40	620*620*9.8	100	5 years

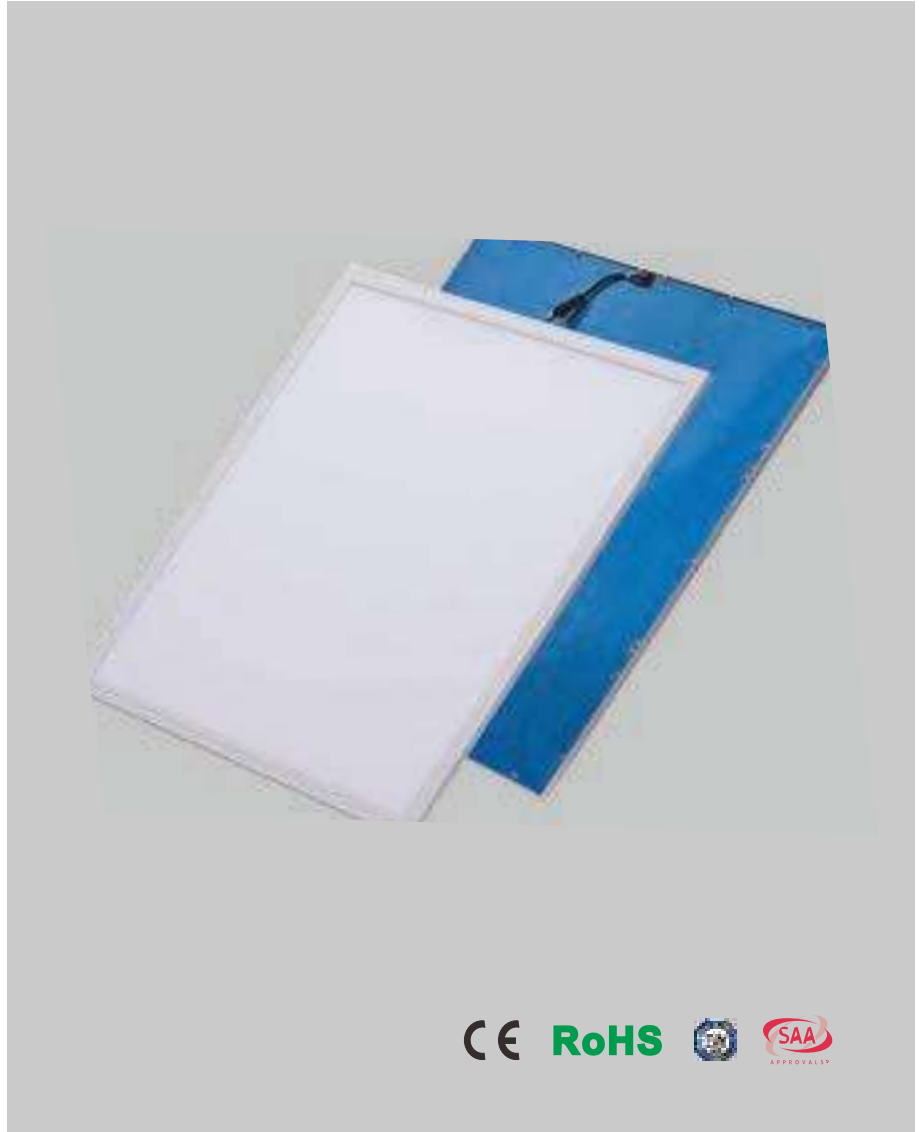

CE RoHS SAA APPROVAL



Product features:

- 1.Ultra-thin design of side light panel lamp.
- 2.High light efficiency and good uniformity.
- 3.100lm/W, 120lm/W, 140lm/W, 160lm/W optional.
- 4.UGR<19 is optional.

► T2 LED Panel Light


Certification : CE / RoHS / TUV / SAA
Angle : 120°
Voltage : AC200-240V 50/60Hz
IP Rating : IP20
CCT : 2700-6500K



T2 LED Panel Light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-12929/4014-20-L	20	295*295*9.8	90	3 years
BQ-FPL-12959/4014-25-L	25	295*595*9.8	90	3 years
BQ-FPL-15959/4014-40-L	40	595*595*9.8	90	3 years
BQ-FPL-129119/4014-40-L	40	295*1195*9.8	100	3 years
BQ-FPL-159119/4014-60-L	60	595*1195*9.8	100	3 years



CE RoHS SAA APPROVAL

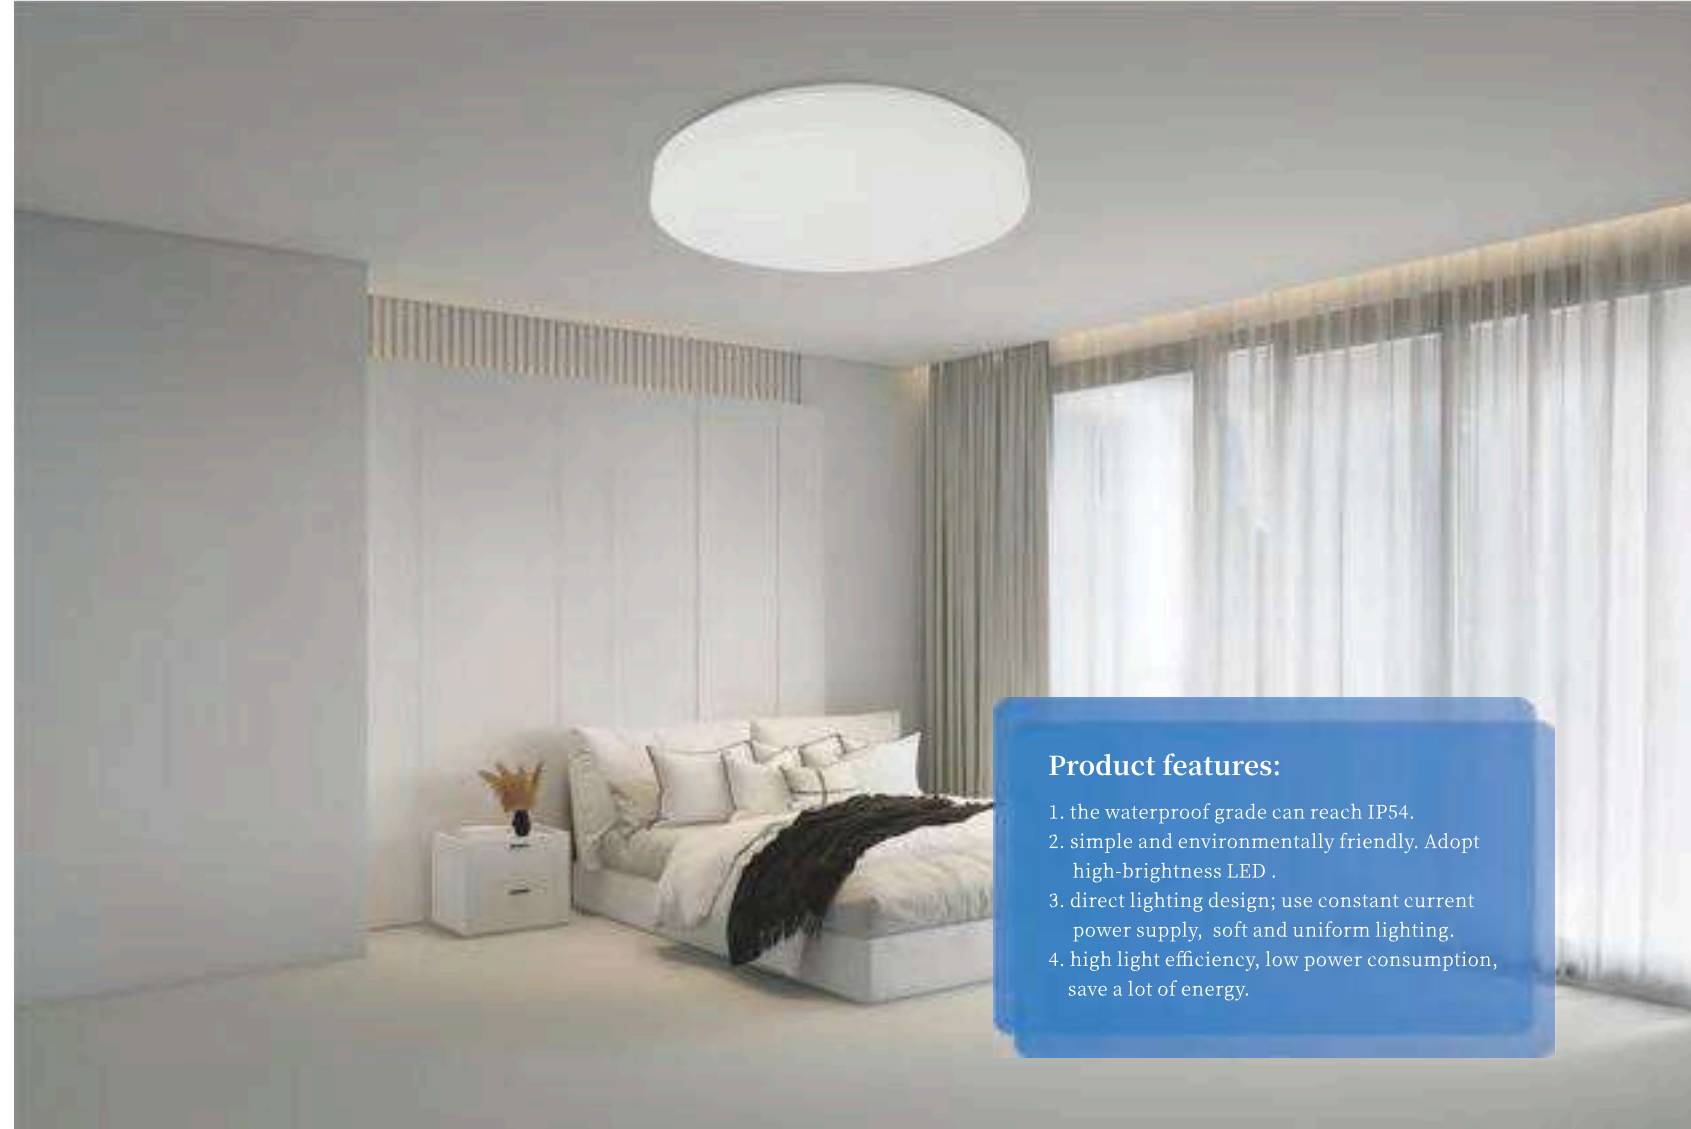

Product features:

- 1. the waterproof grade can reach IP54.
- 2. simple and environmentally friendly. Adopt high-brightness LED .
- 3. direct lighting design; use constant current power supply, soft and uniform lighting.
- 4. high light efficiency, low power consumption, save a lot of energy.

► IP54 LED Ceiling Light


Certification : CE / RoHS
Angle : 120°
Voltage : AC200-240V 50/60Hz
IP Rating : IP54
CCT : 3000K/4000K/6500K



IP54 LED Ceiling Light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-FPL-P3333-36	36	330*330*50	100	3 years
BQ-FPL-P2828-24	24	280*280*50	100	3 years
BQ-FPL-P2222-18	18	220*220*50	90	3 years
BQ-YPL-P330-36	36	Ø330*50	100	3 years
BQ-YPL-P280-24	24	Ø280*50	100	3 years
BQ-YPL-P220-18	18	Ø220*50	90	3 years



CE RoHS SAA APPROVAL

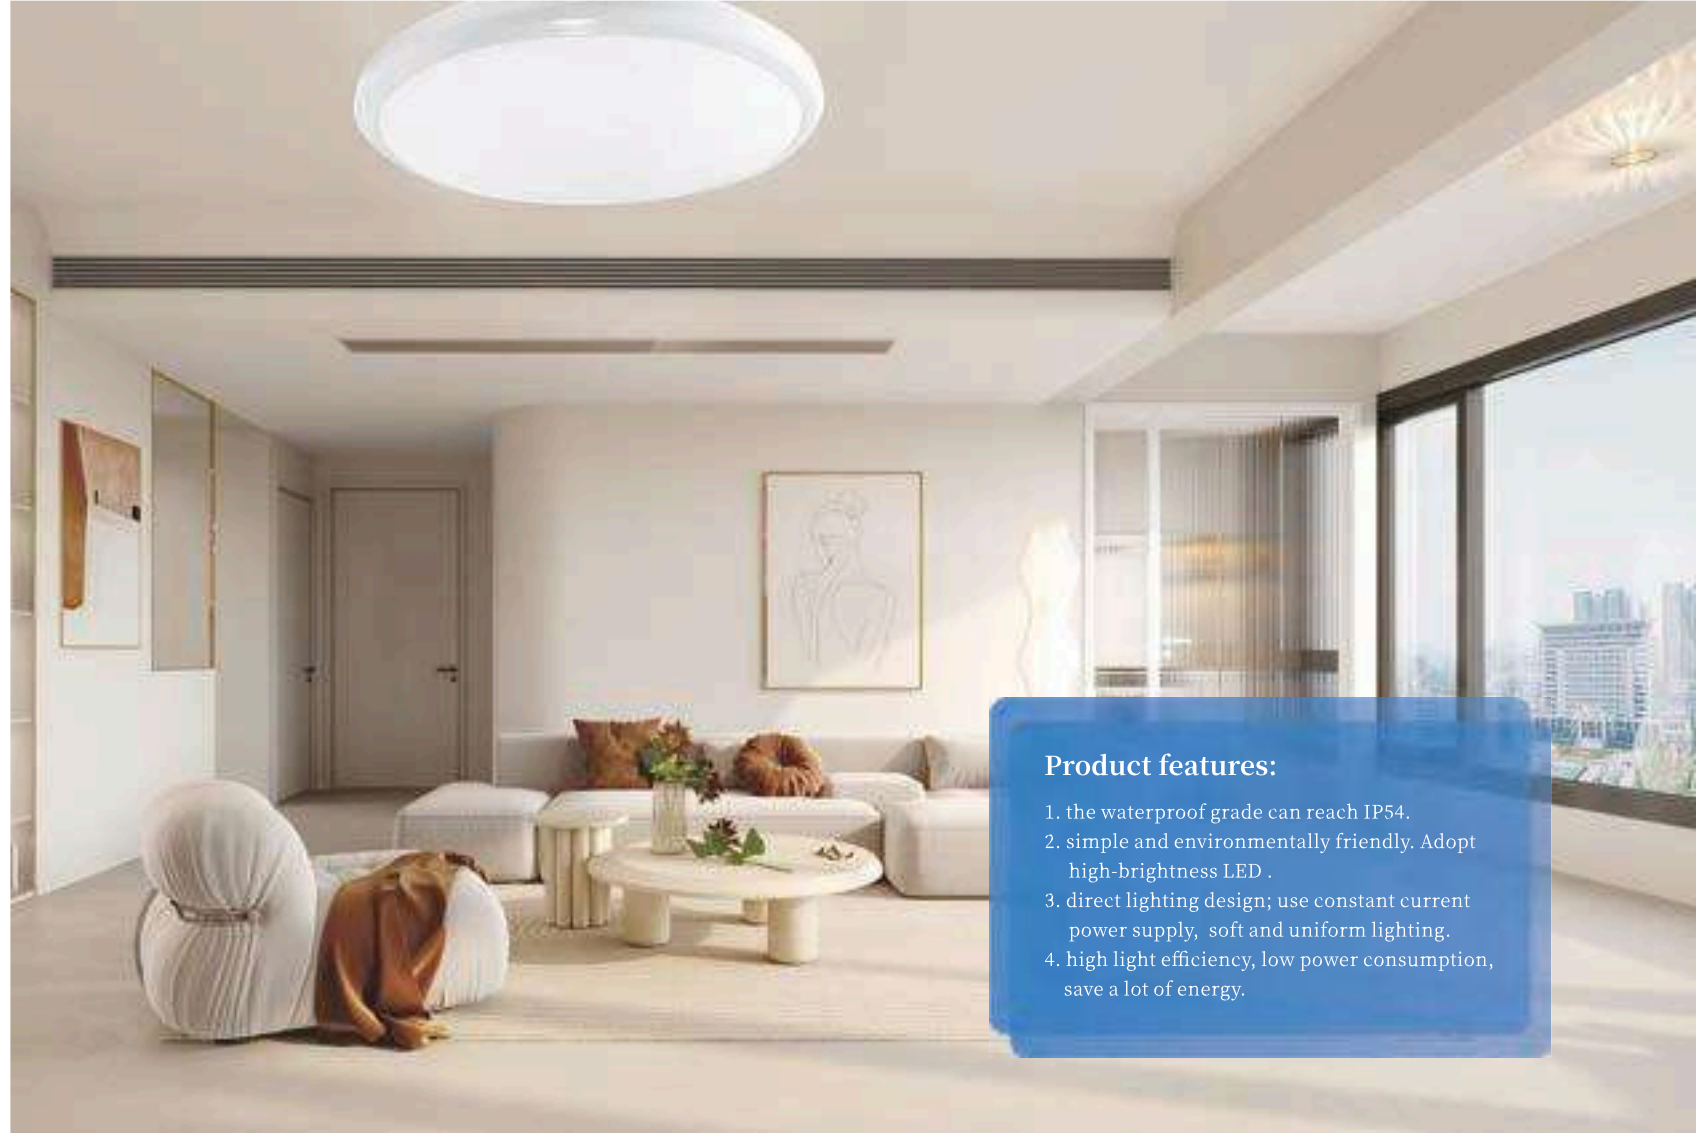

Product features:

1. the waterproof grade can reach IP54.
2. simple and environmentally friendly. Adopt high-brightness LED .
3. direct lighting design; use constant current power supply, soft and uniform lighting.
4. high light efficiency, low power consumption, save a lot of energy.

► IP54 IC LED Ceiling Light


Certification : CE / RoHS
Angle : 120°
Voltage : AC200-240V 50/60Hz
IP Rating : IP54
CCT : 2700-6000K



IP54 LED Linear Ceiling Light				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-YPL-X270-24-IC220	24	Ø270*60	85/95 (Optional)	3 years
BQ-YPL-X320-36-IC220	36	Ø320*60	85/95 (Optional)	3 years



CE RoHS

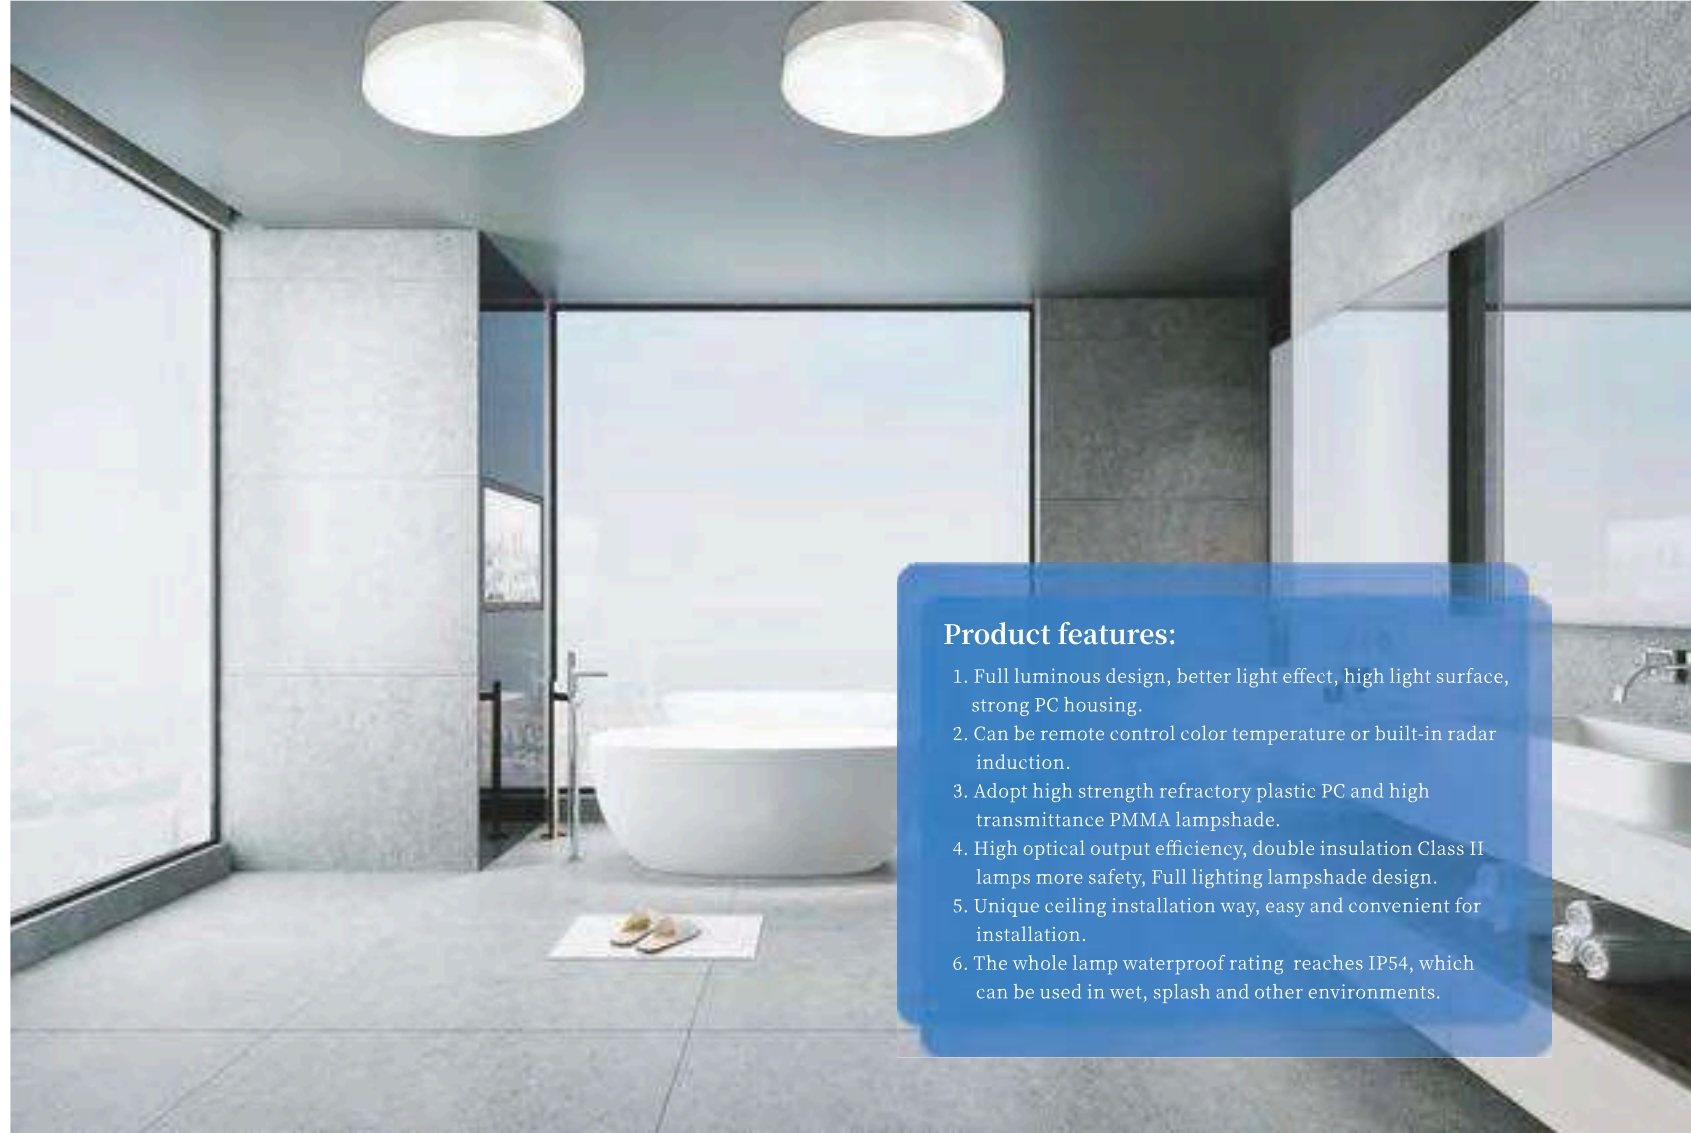

Product features:

1. Full luminous design, better light effect, high light surface, strong PC housing.
2. Can be remote control color temperature or built-in radar induction.
3. Adopt high strength refractory plastic PC and high transmittance PMMA lampshade.
4. High optical output efficiency, double insulation Class II lamps more safety, Full lighting lampshade design.
5. Unique ceiling installation way, easy and convenient for installation.
6. The whole lamp waterproof rating reaches IP54, which can be used in wet, splash and other environments.

► **Surface Mounted LED Panel Light**

Certification : CE / RoHS
Angle : 120°
Voltage : AC100-240V 50/60Hz
IP Rating : IP54
CCT : 2800-6500K



Surface Mounted LED Panel Light - Normal				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-YPL-Q225/2835-18Q	18	Ø225*62	90	3 years




Surface Mounted LED Panel Light - IR-CCT				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-YPL-Q225-M-IR-ON/OFF	18	Ø225*62	90	3 years



Surface Mounted LED Panel Light - Radar				
Model	Power(W)	Dimension(mm)	Light Effect(lm/W)	Warranty
BQ-YPL-Q225/2835-18L	18	Ø225*62	90	3 years



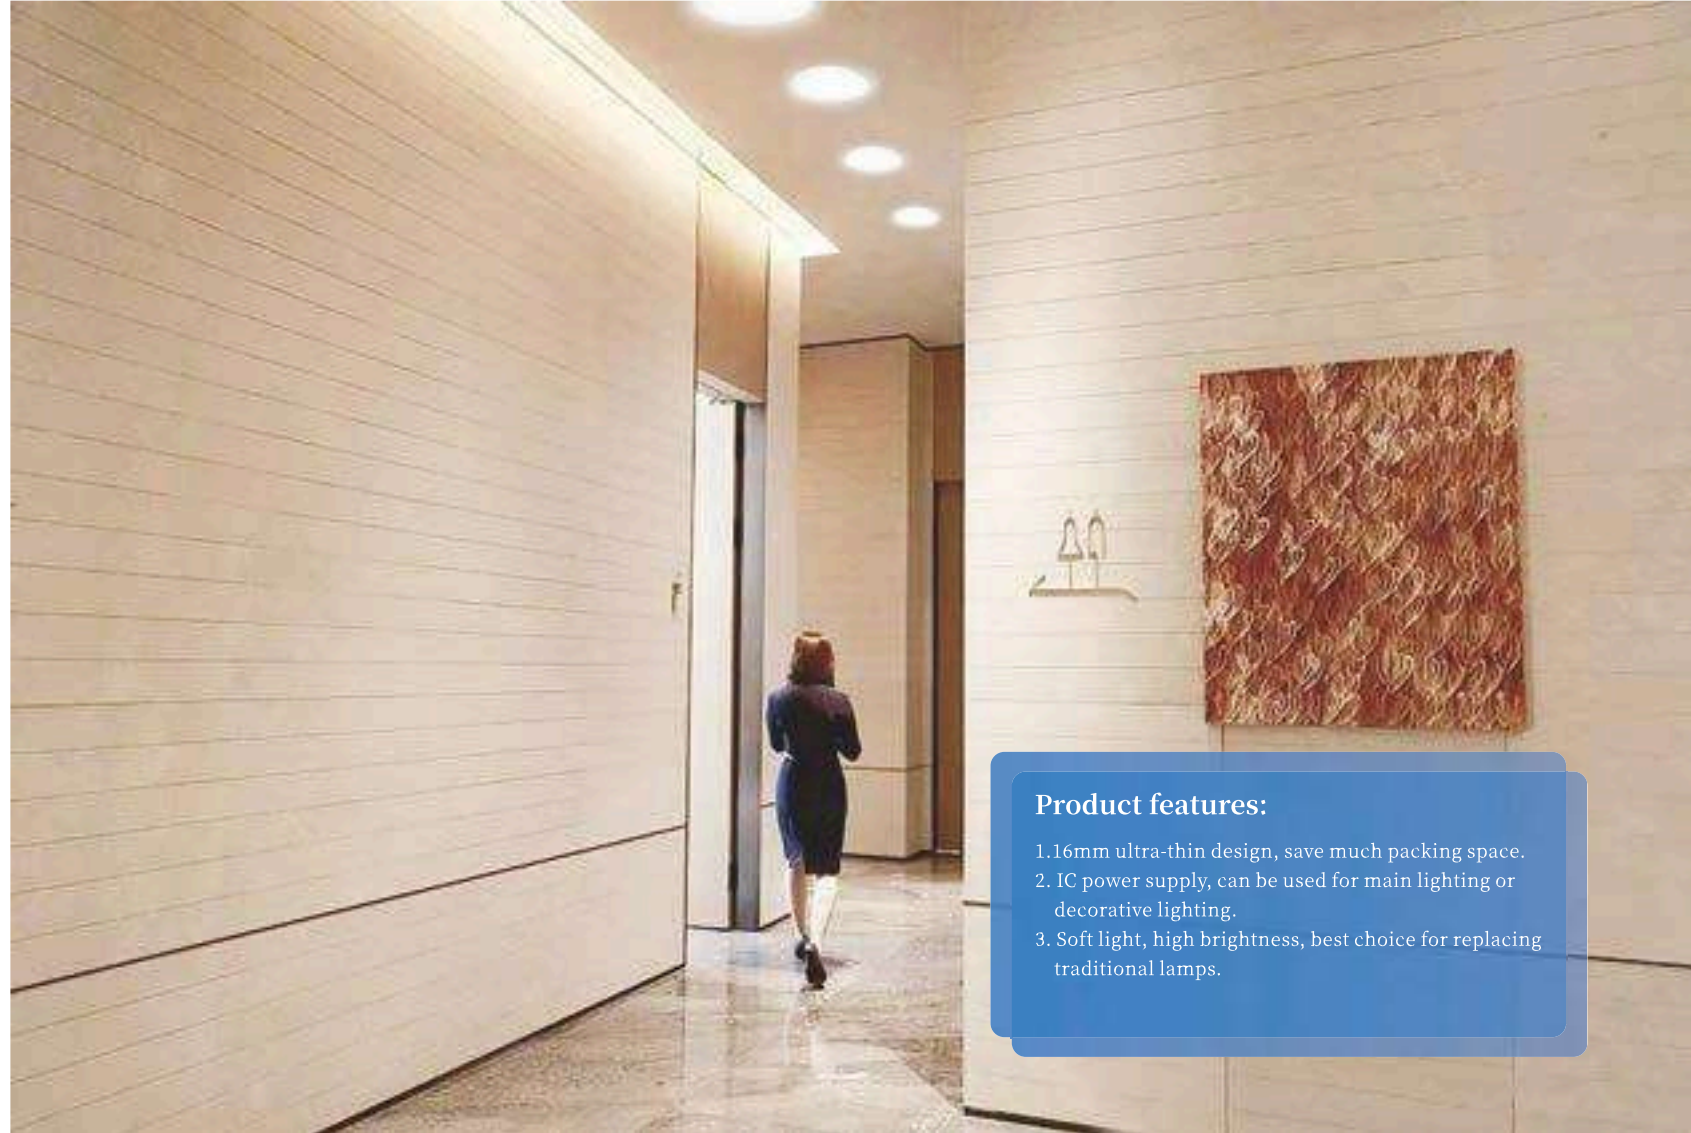

Product features:

1. 1.6mm ultra-thin design, save much packing space.
2. IC power supply, can be used for main lighting or decorative lighting.
3. Soft light, high brightness, best choice for replacing traditional lamps.

► US standard LED Surface Mount Ceiling Light

Certification: ETL/FCC
Angle : 120°
Voltage : AC100-130V 50/60Hz
IP Rating : IP44/IP20
Dimming : Triac



LED Surface Mount Ceiling Light - Single color temperature				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-M300-24	24	Ø300	85-100	3 years



LED Surface Mount Ceiling Light - DIP Switch				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-M300-18	18	Ø300	85-100	3 years
BQ-YPL-M300-24	24	Ø300	85-100	3 years



LED Surface Mount Ceiling Light - Wall Switch				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-M300-18	18	Ø300	85-100	3 years
BQ-YPL-M300-24	24	Ø300	85-100	3 years





Product features:

1. 16mm ultra-thin design, save much packing space.
2. IC power supply, can be used for main lighting or decorative lighting.
3. Soft light, high brightness, best choice for replacing traditional lamps.

▶ EU standard LED Surface Mount Ceiling Light

Certification: CE/ROHS
Angle : 120°
Voltage : AC220-240V 50/60Hz
IP Rating : IP44/IP20
Dimming : No



LED Surface Mount Ceiling Light - Single color temperature				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-M300-24	24	Ø300	85-100	3 years



LED Surface Mount Ceiling Light - DIP Switch				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-M300-18	18	Ø300	85-100	3 years
BQ-YPL-M300-24	24	Ø300	85-100	3 years



LED Surface Mount Ceiling Light - Wall Switch				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-M300-18	18	Ø300	85-100	3 years
BQ-YPL-M300-24	24	Ø300	85-100	3 years



CE RoHS



Product features:

1. With triac dimming driver.
2. 5 Dip switch color change. You can set the color temperature from 2700K to 6500K.
3. The product has high luminous efficiency, less weight, long life, environmental protection and no pollution.
4. The TRIAC dimmable drivers, compatible with LEVITON and Lutron dimmers.

▶ ETL Recessed Round Pane Light

Certification: ETL
Angle : 120°
Voltage : AC100-130V 50/60Hz
IP Rating : IP20
CCT : 2700-6500K




3CCT ETL Recessed Round Pane Light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-U120-9-T-CCT	9	Ø120	70	3 years
BQ-YPL-U175-15-T-CCT	15	Ø175	80	3 years



5CCT ETL Recessed Round Pane Light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-U120-9-T-CCT	9	Ø120	70	3 years
BQ-YPL-U175-15-T-CCT	15	Ø175	80	3 years



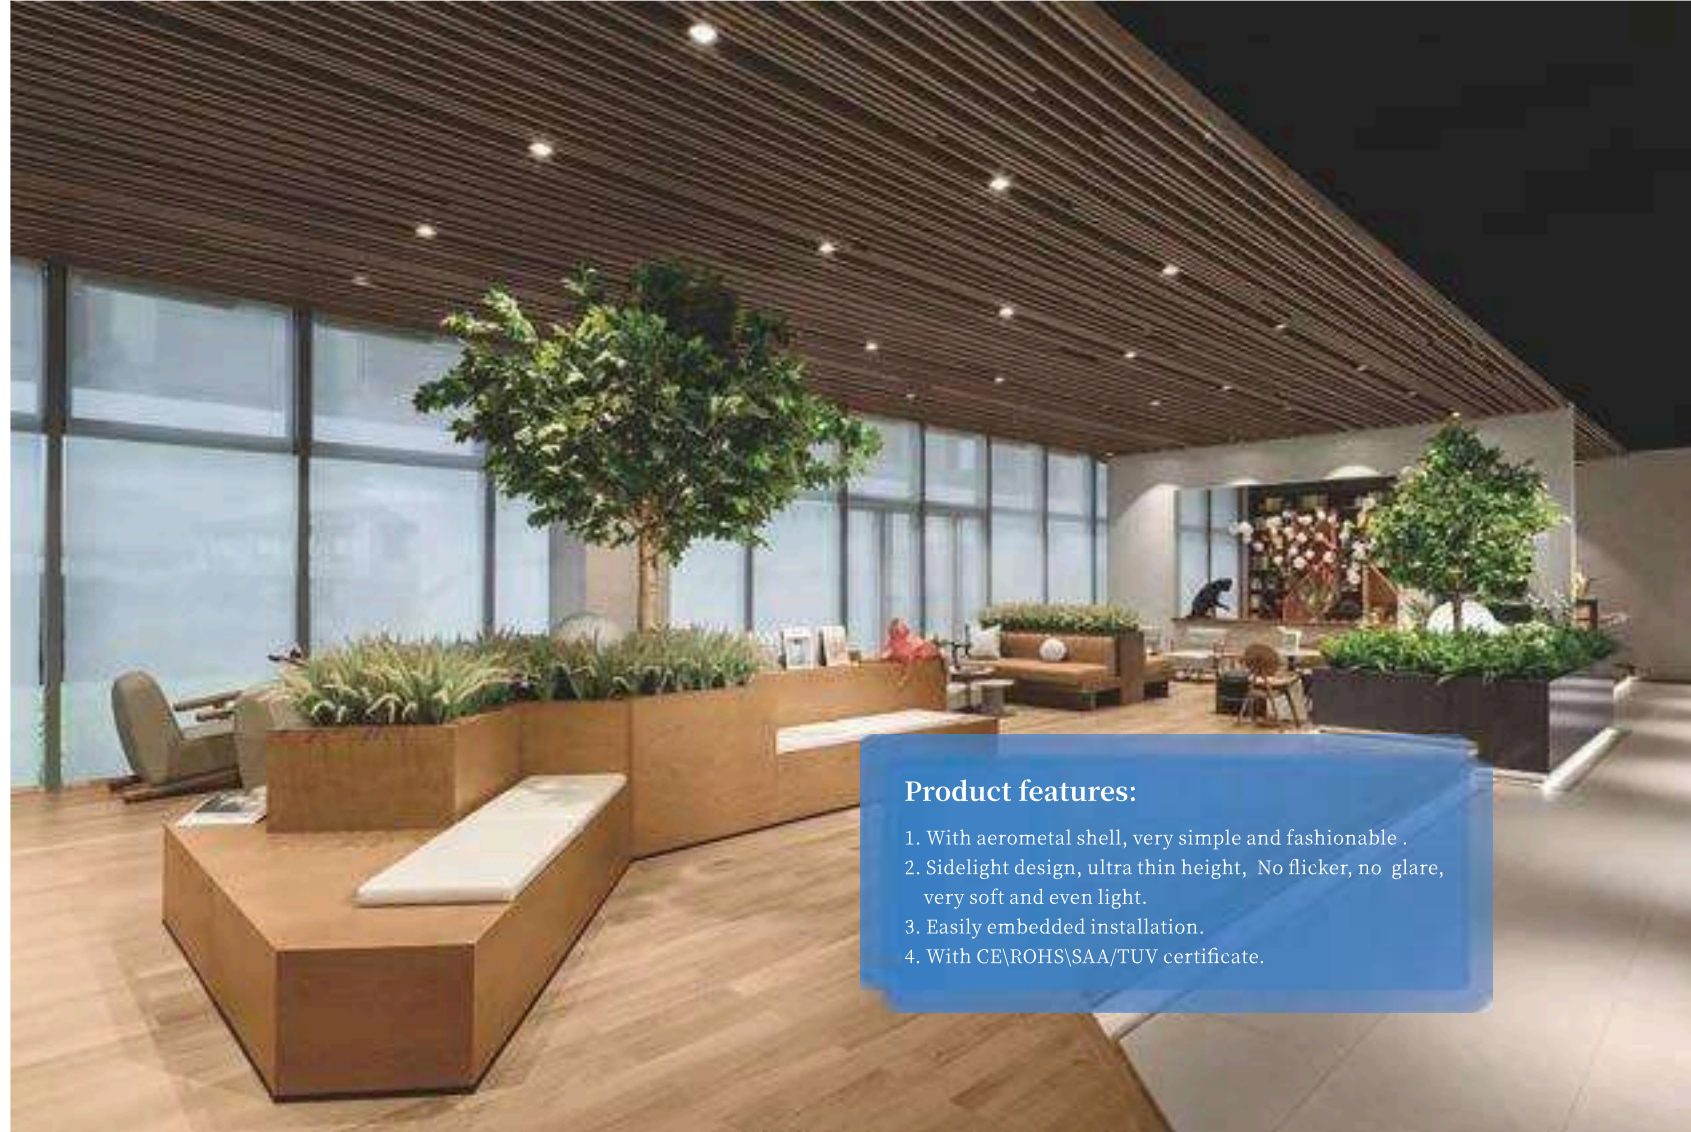

Product features:

1. With aerometal shell, very simple and fashionable .
2. Sidelight design, ultra thin height, No flicker, no glare, very soft and even light.
3. Easily embedded installation.
4. With CE\ROHS\SAA/TUV certificate.

► Recessed LED Panel Light


Certification: CE / ROHS
Angle : 120°
Voltage : AC220-240V 50/60Hz
IP Rating : IP20/Surface IP54
CCT : 2700-6500K



Recessed LED Panel Light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-YPL-J85/2835CB-3A	3	Ø85	50	3 years
BQ-YPL-J120/2835CB-6A	6	Ø120	55	3 years
BQ-YPL-J150/2835CB-9A	9	Ø150	60	3 years
BQ-YPL-J170/2835CB-12A	12	Ø170	70	3 years
BQ-YPL-J190/2835CB-15A	15	Ø190	80	3 years
BQ-YPL-J225/2835CB-18A	18	Ø225	80	3 years
BQ-YPL-J240/2835CB-24A	24	Ø240	80	3 years
BQ-YPL-J300/2835CB-30A	30	Ø300	80	3 years



CE RoHS

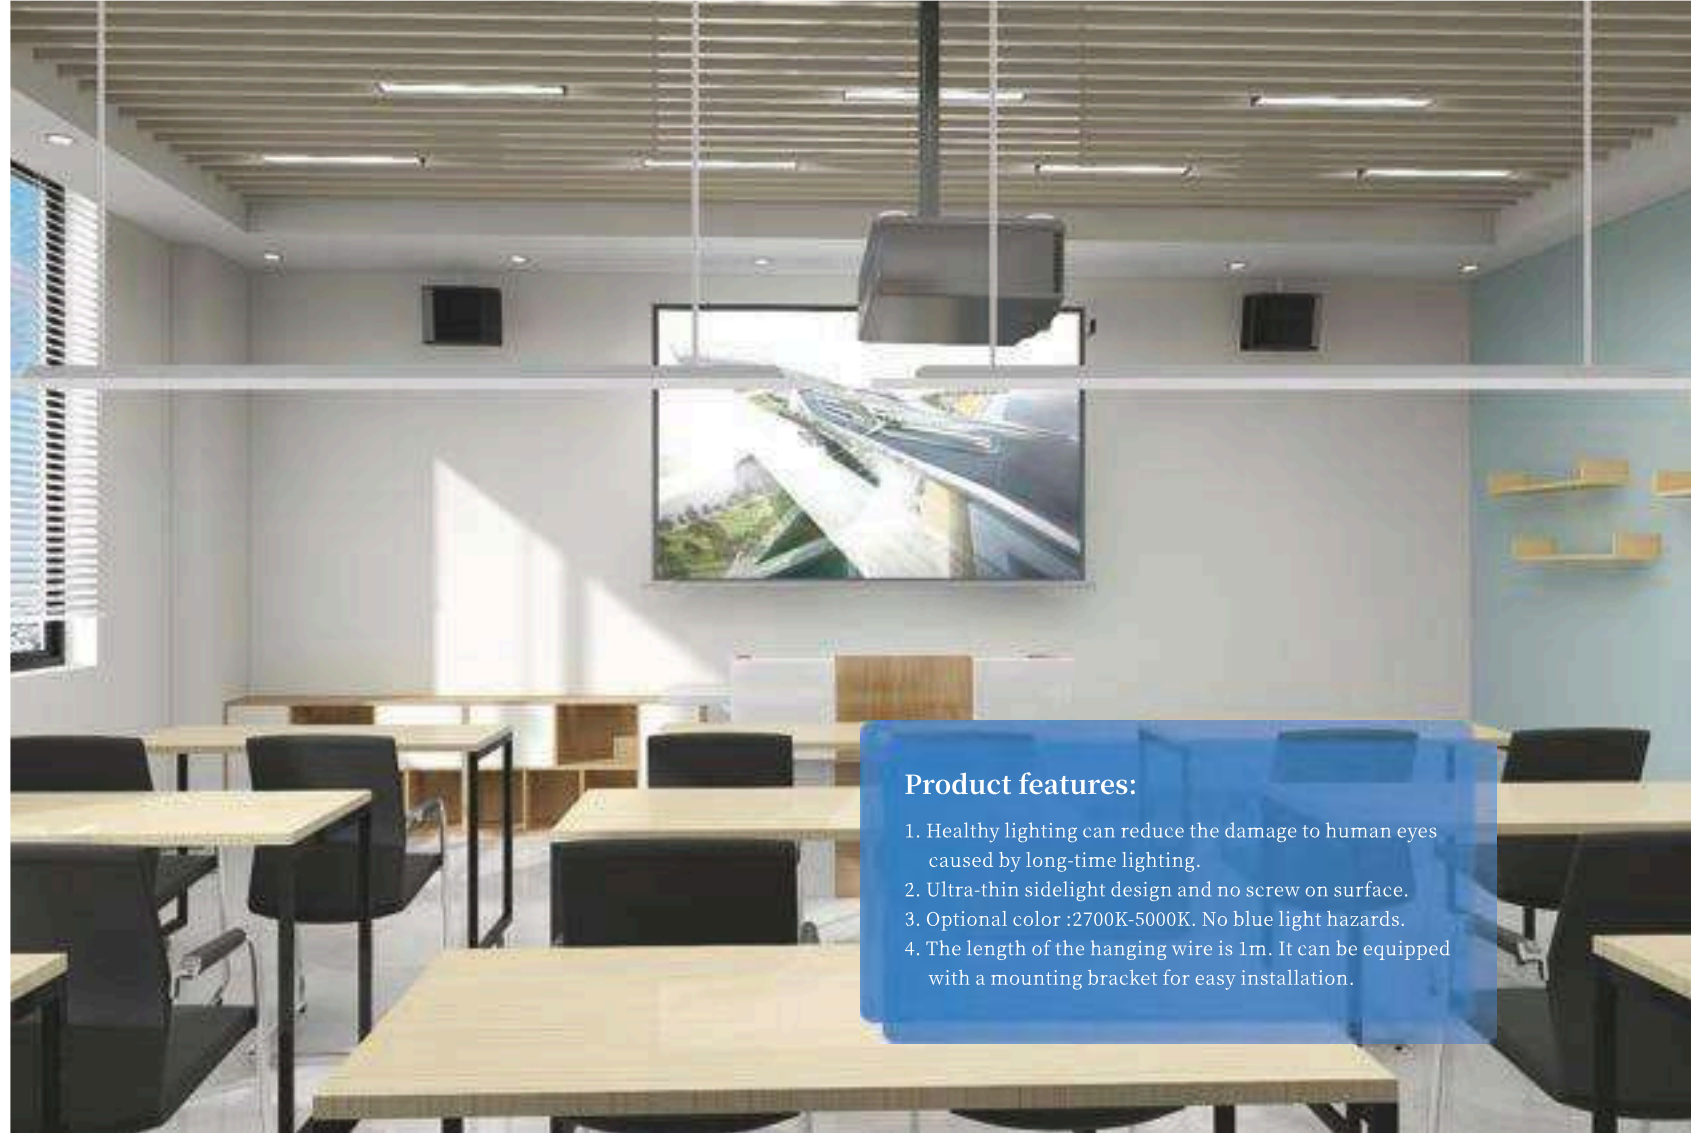

Product features:

1. Healthy lighting can reduce the damage to human eyes caused by long-time lighting.
2. Ultra-thin sidelight design and no screw on surface.
3. Optional color :2700K-5000K. No blue light hazards.
4. The length of the hanging wire is 1m. It can be equipped with a mounting bracket for easy installation.

▶ LED Classroom Light

Certification: CE / ROHS / TUV / CCC
UGR : ≤16
Voltage : AC220-240V 50/60Hz
IP Rating: IP20
CCT: 2700-5000K
Ra: ≥97
R1~R15: ≥90



LED Classroom Light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-FPL-C30120-36	36	300*1200	100	3 years





Product features:


1. Healthy lighting can reduce the damage to human eyes caused by long-time lighting.
2. Ultra-thin sidelight design and no screw on surface.
3. Optional color :2700K-5000K. No blue light hazards.
4. The length of the hanging wire is 1m. It can be equipped with a mounting bracket for easy installation.
5. Healthy lighting, uniform brightness of blackboard, clearer writing.


▶ LED Blackboard Light

Certification: CE / ROHS / TUV / CCC
PF : 0.98
Voltage : AC220-240V 50/60Hz
IP Rating: IP20
CCT: 2700-5000K
Ra: >97
R1~R15: >90



LED Classroom Light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-BBL-1200-36	36	1200*65*54	90	3 years

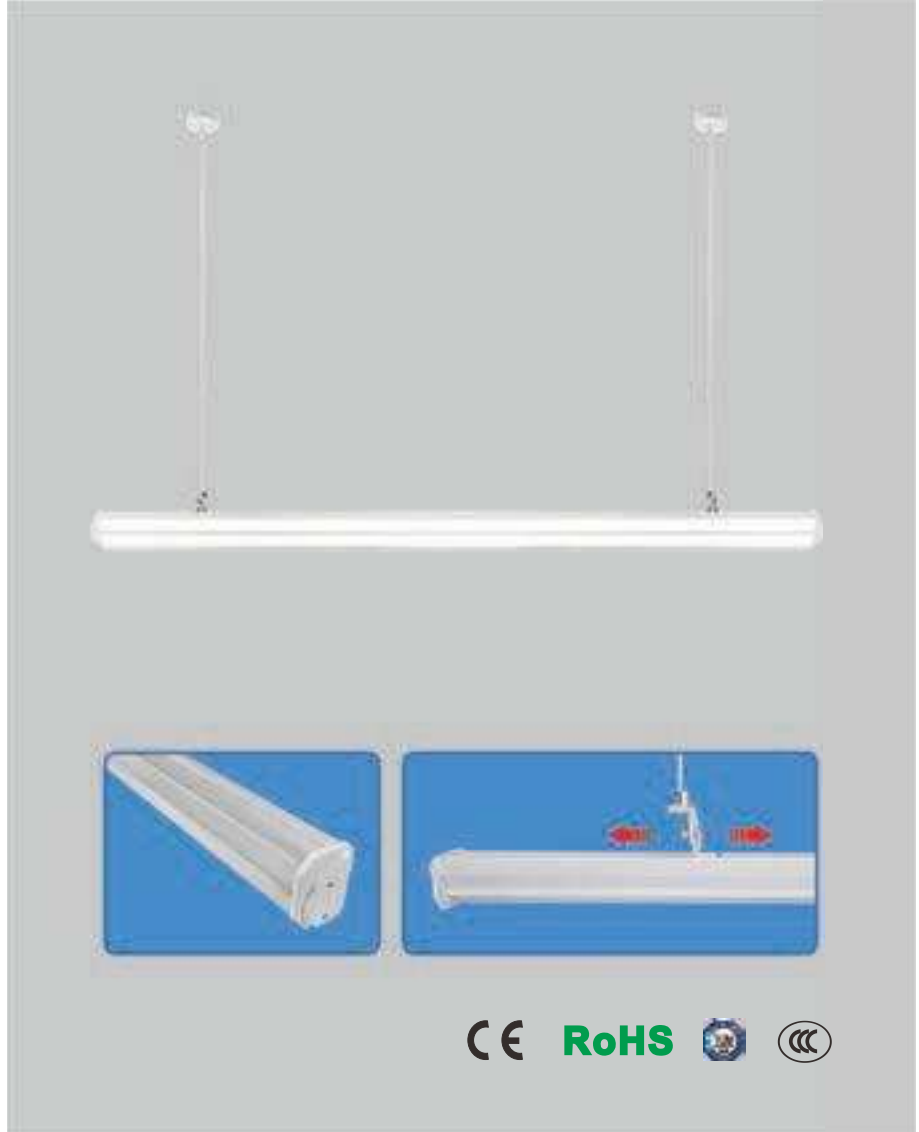

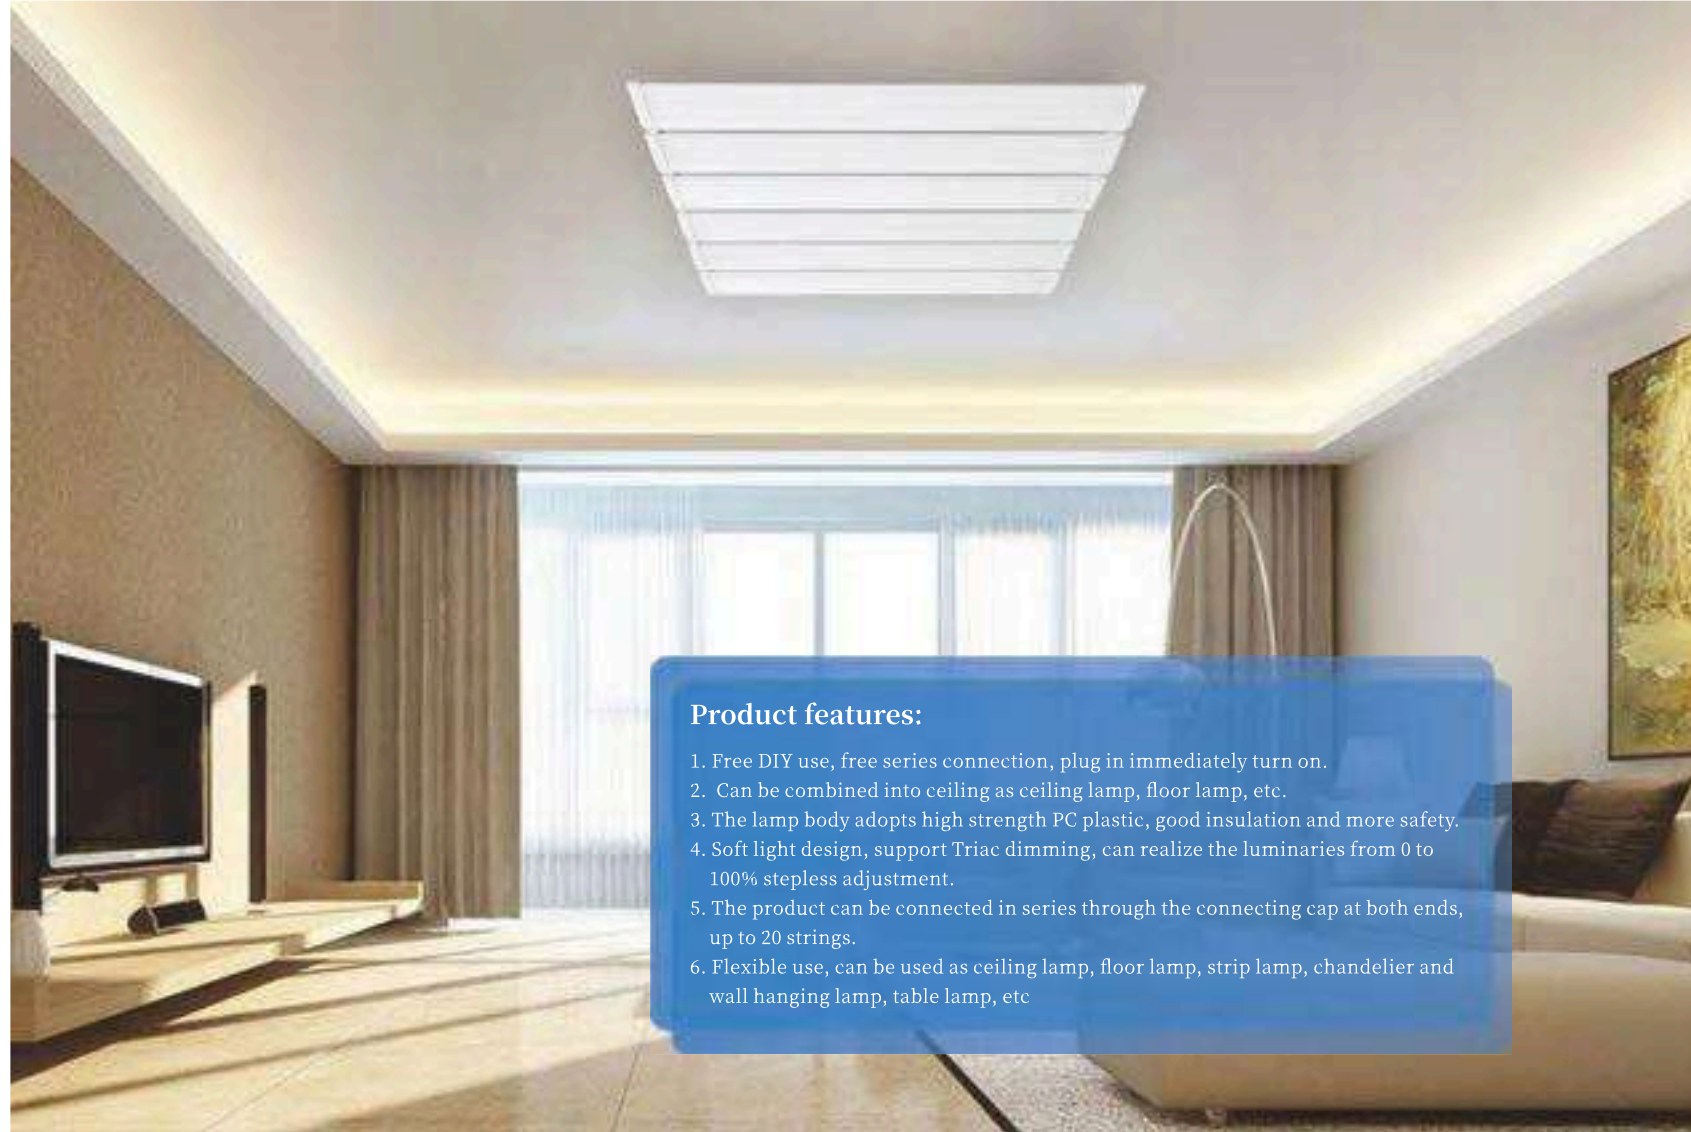

Product features:

1. Free DIY use, free series connection, plug in immediately turn on.
2. Can be combined into ceiling as ceiling lamp, floor lamp, etc.
3. The lamp body adopts high strength PC plastic, good insulation and more safety.
4. Soft light design, support Triac dimming, can realize the luminaries from 0 to 100% stepless adjustment.
5. The product can be connected in series through the connecting cap at both ends, up to 20 strings.
6. Flexible use, can be used as ceiling lamp, floor lamp, strip lamp, chandelier and wall hanging lamp, table lamp, etc

▶ LED Fold Light


Certification: CE / ROHS
LED Driver: IC
Voltage : AC220-240V 50/60Hz
IP Rating: IP20
CCT: 2700-6500K



LED Classroom Light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-TPL-ZD300-6*3	6*3	300*93*33	90	3 years
BQ-TPL-ZD600-12*3	12*3	600*93*33	90	3 years
BQ-TPL-ZD1200-24*3	24*3	1200*93*33	90	3 years



CE RoHS

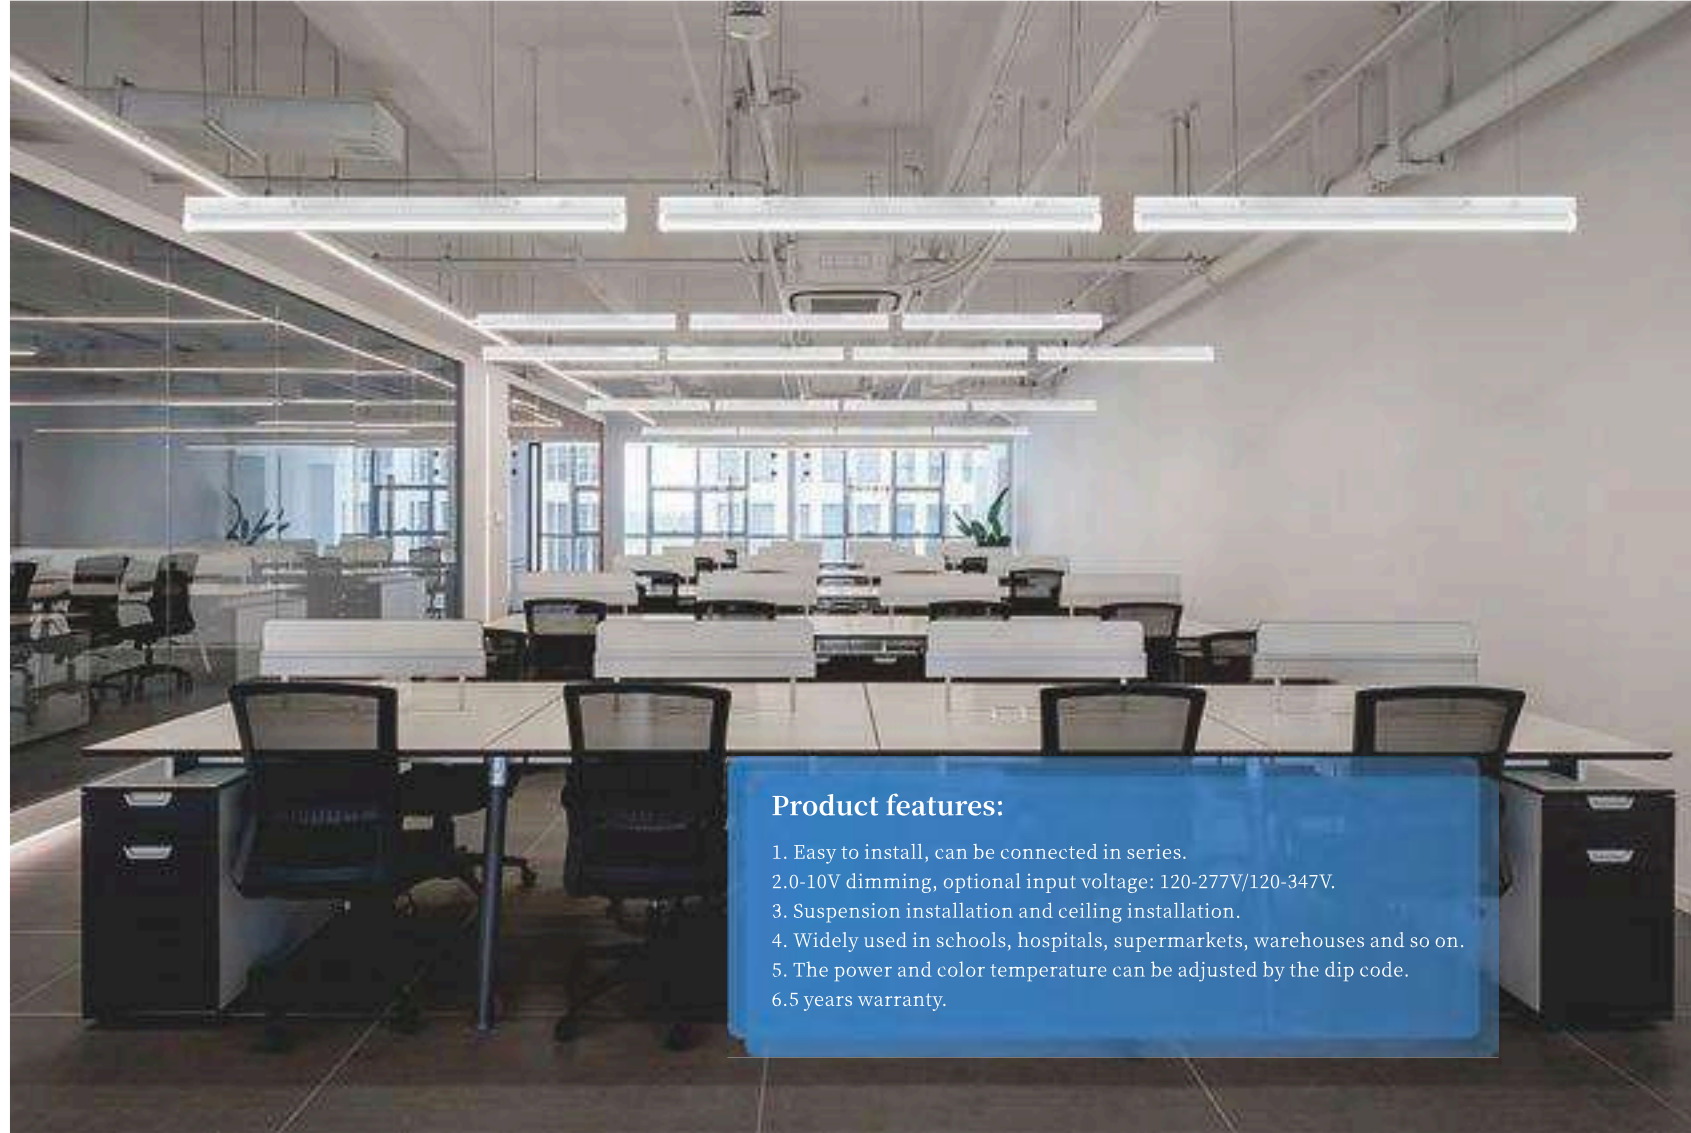

Product features:

1. Easy to install, can be connected in series.
2. 0-10V dimming, optional input voltage: 120-277V/120-347V.
3. Suspension installation and ceiling installation.
4. Widely used in schools, hospitals, supermarkets, warehouses and so on.
5. The power and color temperature can be adjusted by the dip code.
6. 5 years warranty.


▶ LED Linear Strip Light

Certification: ETL / FCC
PF: ≥0.9
Voltage : 120-277V/120-347V 50/60Hz
IP Rating: IP20
CCT: 2700-6000K



LED Linear Strip Light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-SL-1200-40W	40	1220*75*83	130	5 years
BQ-SL-1200-40W-CCT	30-35-40	1220*75*83	130	5 years
BQ-SL-2400-80W	80	2438*75*83	130	5 years
BQ-SL-2400-80W-CCT	60-70-80	2438*75*83	130	5 years



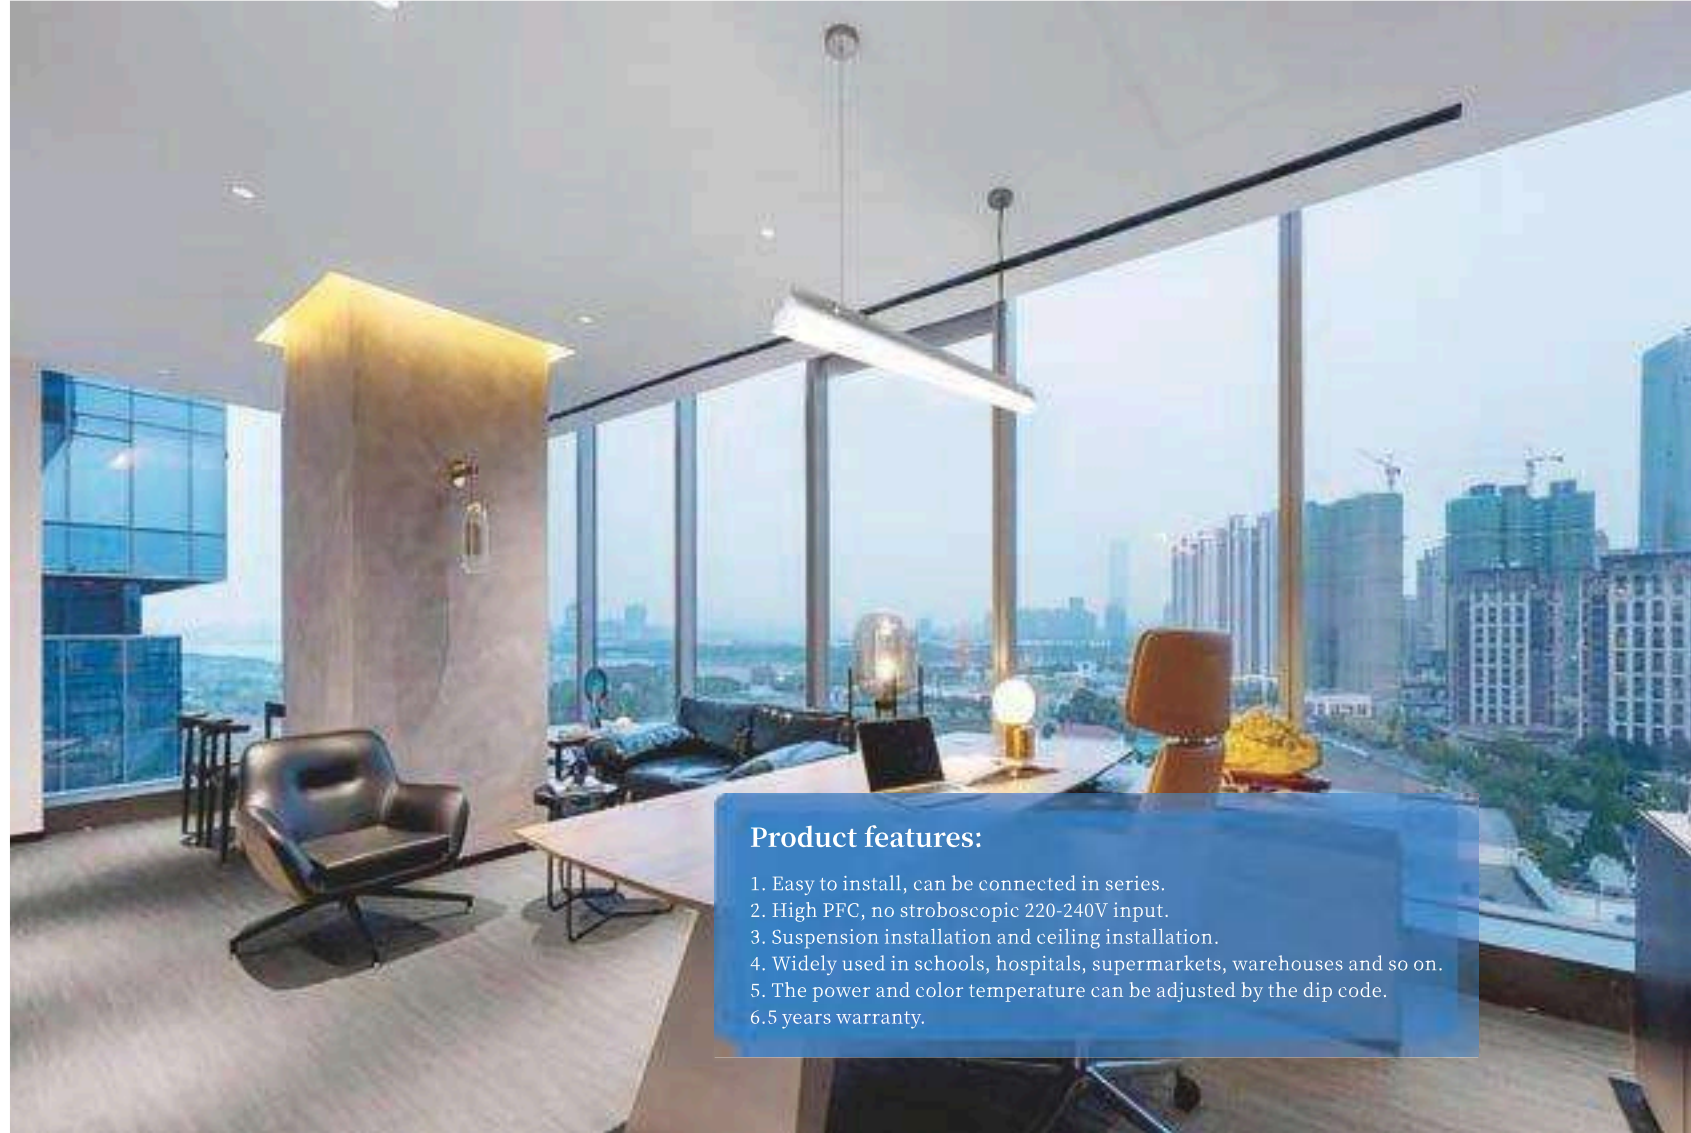

Product features:

1. Easy to install, can be connected in series.
2. High PFC, no stroboscopic 220-240V input.
3. Suspension installation and ceiling installation.
4. Widely used in schools, hospitals, supermarkets, warehouses and so on.
5. The power and color temperature can be adjusted by the dip code.
6. 5 years warranty.

▶ LED Linear Strip Light


Certification: CE / ROHS
PF: ≥ 0.9
Voltage : AC220-240V 50/60Hz
IP Rating: IP20
CCT: 2700-6000K



LED Linear Strip Light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-SL-1200-40W	40	1220*75*83	130	5 years
BQ-SL-1200-40W-CCT	30-35-40	1220*75*83	130	5 years
BQ-SL-2400-80W	80	2438*75*83	130	5 years
BQ-SL-2400-80W-CCT	60-70-80	2438*75*83	130	5 years



CE RoHS

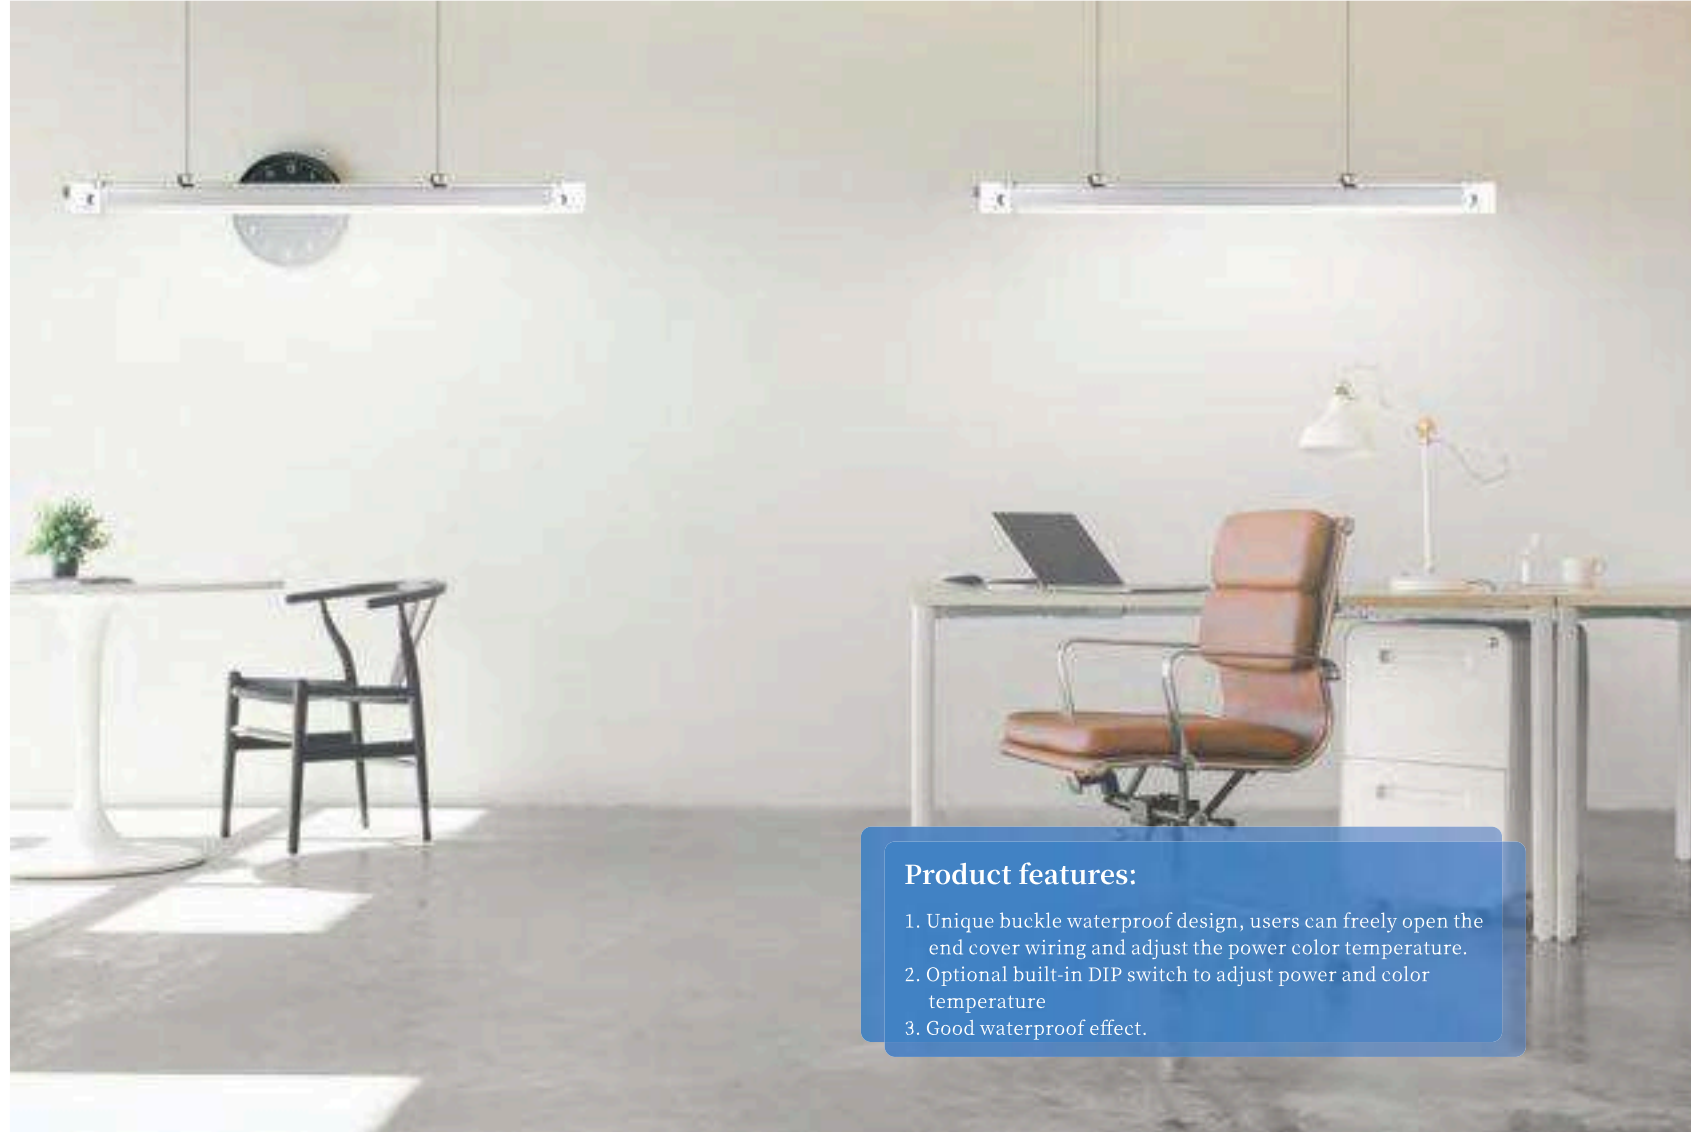

Product features:

1. Unique buckle waterproof design, users can freely open the end cover wiring and adjust the power color temperature.
2. Optional built-in DIP switch to adjust power and color temperature
3. Good waterproof effect.

▶ IP65 LED Linear Strip Light

Certification: CE / ROHS / FCC/ETL
PF: >0.9
Voltage : AC120-277V(AS) / AC220-240V(ES) 50/60Hz
IP Rating: IP65
CCT: 2700-6500K



LED Linear Strip Light				
Model	Power(W)	Size (mm)	Light Effect(lm/W)	Warranty
BQ-SL-L1200-40W-AP	20/30/40	1200x73x61	130	5 years
BQ-SL-L1200-40W-AP	30/35/40	1200x73x61	130	5 years
BQ-SL-L2400-70W-AP	50/60/70	2400x73x63	130	5 years
BQ-SL-L2400-60W-AP	40/50/60	2400x73x63	130	5 years



CE RoHS FC